

**Anritsu** Advancing beyond

# ML2439A

Power Meter



## ML2439A Power Meter



ML2439A Power Meter and Sensors

### Introduction

The ML2439A provides design engineers and technicians the utility of traditional benchtop instrument, the flexibility and performance of modern USB power sensors, and the simplicity of a multi-touch display.

As a benchtop meter, the ML2439A provides a standalone solution for capturing, displaying, and analyzing peak and average/RMS power in both the time and statistical domains through an intuitive, multi-touch, touch-screen display.

The ML2439A Power Meter utilizes up to four Anritsu USB power sensors with industry-leading performance and capabilities either independently or for synchronized multi-channel measurements of CW, modulated, and pulsed signals.

Providing the ultimate flexibility, the Anritsu USB power sensors can be disconnected and independently used as standalone instruments.

### Key Features


- Capture/display/analyze peak and average/RMS power
- Frequency range from 10 MHz to 50 GHz
- Industry-leading video bandwidth (195 MHz) and rise time (3 ns)
- Industry-leading 100,000 measurements per second
- Industry-leading 100 ps time resolution
- Synchronous multi-channel measurements (up to 4 channels)
- Sensors can be used as standalone instruments

# ML2439A Power Meter

The ML2439A's intuitive, multi-touch display enables fast configuration of up to four sensors as well as easy access to measurement and analysis tools, providing a standalone solution for capturing, displaying, and analyzing peak and average power in both the time and statistical domains. The meter also incorporates a test source to verify sensor operation.





## Measurement Modes

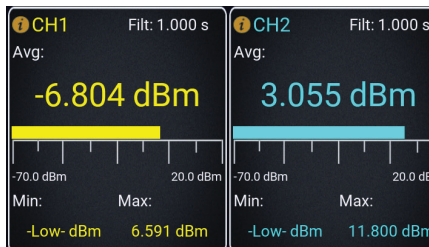


### Continuous Mode

For simple, intuitive measurements of repetitive waveforms, the ML2439A Continuous Mode of operation in graph and text views provides a numeric display of average, maximum and minimum signal powers.

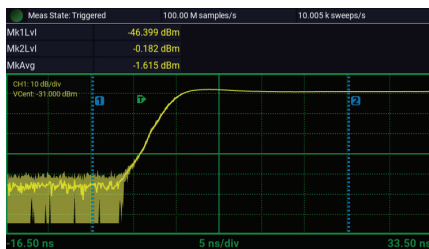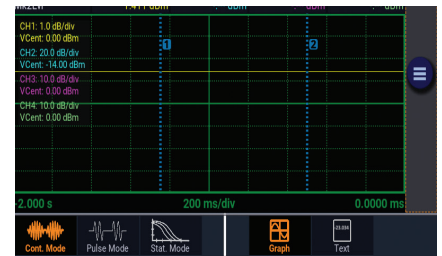

### Pulsed Mode

Analysis of fast-rising single pulses or pulses with short pulse repetition intervals (PRIs) requires an instrument with sophisticated trigger and data acquisition capability. Within Pulsed Mode, graph view displays pulse amplitude vs time. More than 16 pulse parameters can be measured in text view.

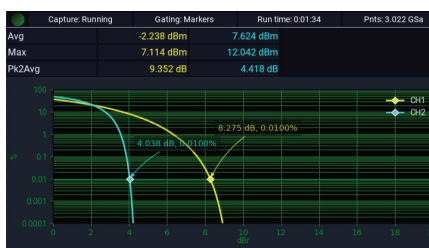

### Statistical Mode

In Statistical Mode, the ML2439A plots the Complementary Cumulative Distribution Function (CCDF). The CCDF plot shows the rate of occurrence of a specific crest factor for signals, such as those used in 5G, 4G/LTE, and Wi-Fi applications.



## High-Performance and Versatile USB Power Sensors

The Anritsu ML2439A Power Meter utilizes Anritsu families of USB power sensors with industry leading performance and capabilities. All sensors incorporate unique Real-Time Power Processing™ technology, which virtually eliminates gaps in measurement suffered by other power sensors and enables industry best measurement speeds. In terms of performance, the series Real-Time Peak Power Sensors are the fastest responding sensors with 3 ns rise times and 195 MHz of video bandwidth. Real-Time True Average Power Sensors enable the lowest frequency measurements for diode-based average power measuring sensors and can make accurate measurements virtually independent of signal modulation bandwidth. Sensors offer flexible connectivity and performance leadership at an excellent price point.

### MA244xxA Series Real-Time Peak Power Sensors

- 6 GHz, 8 GHz, 18 GHz, and 40 GHz models
- Up to 195 MHz VBW and 3 ns rise time
- 100,000 measurements per second
- Real-time processing of power readings
- 100 MS/s continuous and 10 GS/s effective sampling rates
- 100 ps time resolution for rising/falling edge measurements
- Full pulse profiling
- Crest factor, CCDF and statistical measurements

### MA241xxA<sup>1</sup> and MA242xxA True RMS CW Power Sensors

- Frequency range: 10 MHz to 18 GHz
- Power measurement range: +20 dBm to -60 dBm
- True RMS measurements – modulation independent
- Fast measurement speed: >1,600 readings/s continuous, >11,000 readings/s buffered
- No Zeroing required above -45 dBm
- Able to accept high power levels before being damaged: +30 dBm CW, +34 dBm, 10  $\mu$ s

<sup>1</sup> MA24103A, MA24105A, and MA24106A not supported.

### MA243xxA Series True RMS CW Power Sensors

- Frequency range: 10 MHz to 50 GHz
- Power measurement range: +20 dBm to -70 dBm
- CW average power measurements
- Fast measurement speed: >2,100 readings/s continuous, >5,600 readings/s buffered
- Able to accept high power levels before being damaged: +26 dBm CW, +32 dBm, 10  $\mu$ s
- No Zeroing required above -45 dBm

### All Anritsu USB Power Sensor Feature

- NIST traceable calibrations
- Compatible with Anritsu handheld instruments
- Silicone protective covering for additional field durability
- Worldwide calibration and service centers




## Real-Time Power Processing

Real-Time Power Processing<sup>1</sup> (RTPP) dramatically reduces the total cycle time for acquiring and processing power measurement samples. By combining a dedicated acquisition engine, hardware trigger, integrated sample buffer, and a real-time optimized parallel processing architecture, Real-Time Power Processing™ performs most of the sweep processing steps simultaneously, beginning immediately after the trigger instead of waiting for the end of the acquisition cycle.

The advantages of the Real-Time Power Processing technique are that key processing steps take place in parallel and keep pace with the signal acquisition. With no added computational overhead to prolong the sweep cycle, the sample buffer cannot overflow. As a result, there is no need to halt acquisition for trace processing. This means gap-free signal acquisition virtually guarantees that intermittent signal phenomena such as transients or dropouts will be reliably captured and analyzed.

<sup>1</sup> RTPP is available within the MA24400A series sensors.


Dropouts, such as those shown are the sorts of events often missed by conventional power meters due to the acquisition gaps while processing takes place.

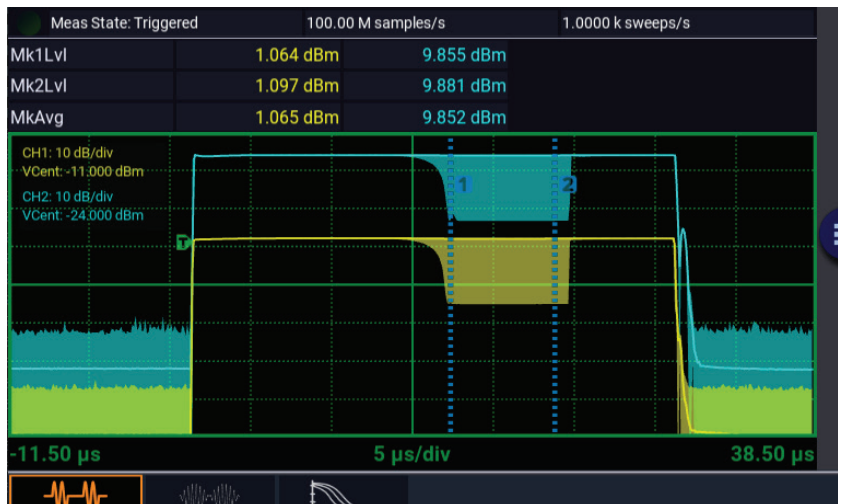

## Measurement Buffer Mode<sup>1</sup>

The Measurement Buffer Mode is a remote control function that works in conjunction with Real-Time Power Processing to provide only the relevant burst or pulse information, eliminating the need to download and post-process large sample buffers. As a result, users can collect and analyze measurements from a virtually unlimited number of consecutive pulses or events without gaps. A wide variety of parameters can be calculated and plotted, such as duty cycle, pulse repetition rate, pulse width variation, and pulse jitter. In addition, anomalies, such as dropouts, can be identified.

<sup>1</sup> Available within MA24400A sensors

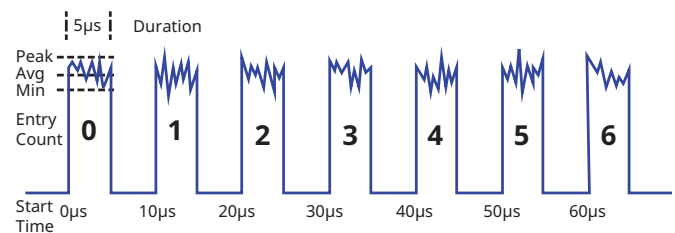

Example Seven Pulse Waveform


Entry Count	Interval Start	Interval Duration	Interval Average	Interval Minimum	Interval Peak
0	0.00 us	5.01 us	-0.043 dBm	-39.042 dBm	8.826 dBm
1	9.99 us	5.00 us	-0.006 dBm	-38.431 dBm	8.827 dBm
2	19.99 us	5.01 us	0.039 dBm	-41.549 dBm	9.742 dBm
3	30.00 us	5.00 us	0.017 dBm	-38.551 dBm	9.8021 dBm
4	40.01 us	5.00 us	0.022 dBm	-40.699 dBm	9.477 dBm
5	49.99 us	5.00 us	-0.020 dBm	-39.706 dBm	8.102 dBm
6	60.00 us	5.99 us	0.036 dBm	-37.803 dBm	9.750 dBm

Measurement Buffer Data Returned for Waveform in Above


## Addressing Communications and Radar Measurement Challenges

### Wi-Fi and Wireless Communication Signal Analysis


Characterization and compliance testing of Wi-Fi and LTE chipsets and devices involves significant challenges for design and test engineers. With multiple-input, multiple-output (MIMO) architectures and channel bandwidths up to 160 MHz, testing is complex, especially when measuring power per channel and time alignment between channels. The ML2439A enables packet power measurements to be performed independently on multiple synchronous or asynchronous transmit chains with a common timebase shared among sensors.

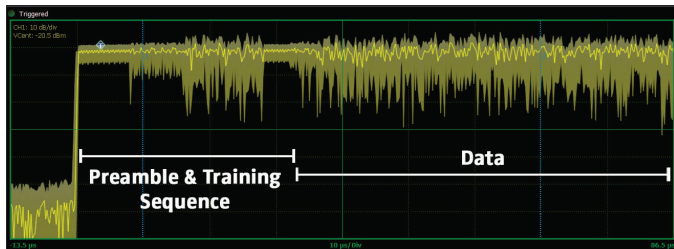


Use markers to define a portion of the waveform on which to make measurements. **“Between Marker” measurements** are ideal for monitoring specific portions of a packet over long intervals.

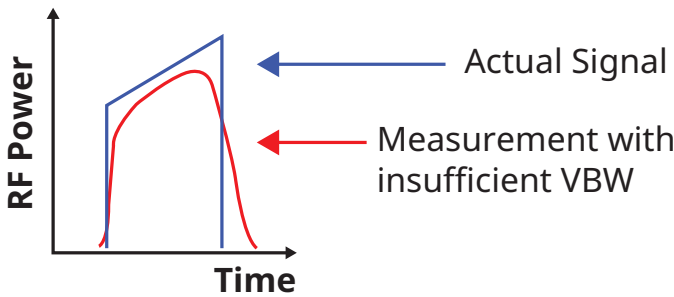

Video bandwidth (VBW) describes the ability of a power sensor to track peak (envelope) power. Insufficient VBW will result in errant envelope and average power measurements. The ML2439A offers the **widest video bandwidth (195 MHz)** making it ideal for measuring 80 MHz, 100 MHz, and 160 MHz channels.

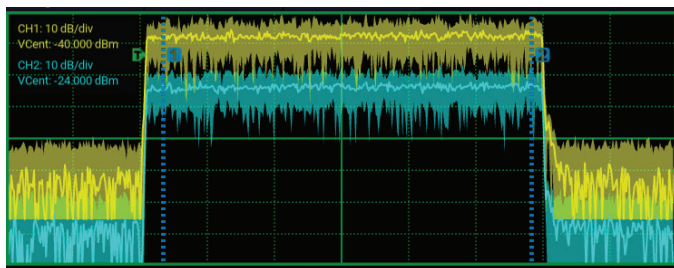

By comparing the peak-to-average power ratio, or crest factor (CF), of input and output signals of an transmission chain, engineers can assess circuit linearity. Additional insight can be provided with the ML2439A statistical mode **Complementary Cumulative Distribution Function (CCDF)** plot displaying the rate of occurrence of a specific CF. As an amplifier output compresses, the CF will reduce and the CCDF plot will move left.

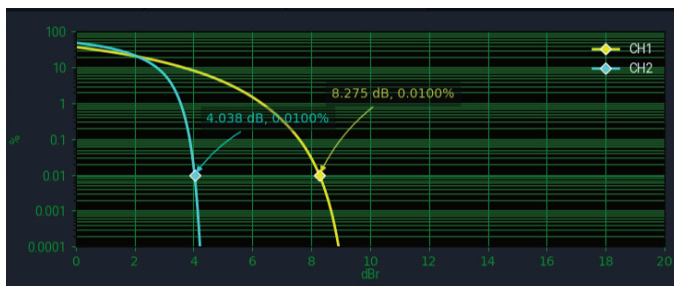


## Addressing Communications and Radar Measurement Challenges


### Secondary Surveillance Radar (SSR)



Design, verification, troubleshooting and maintenance of secondary surveillance radar (e.g. IFF-based radar) has never been more demanding.

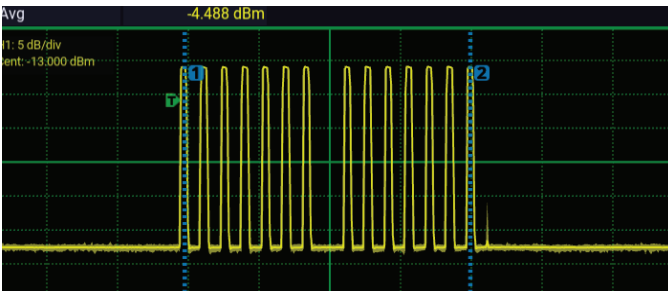

Proper design and operation of SSR systems is critical to the safety and security of aviation. The ML2439A can be used to easily and accurately capture SSR waveforms. Markers enable measurements on specific portions of the waveform.

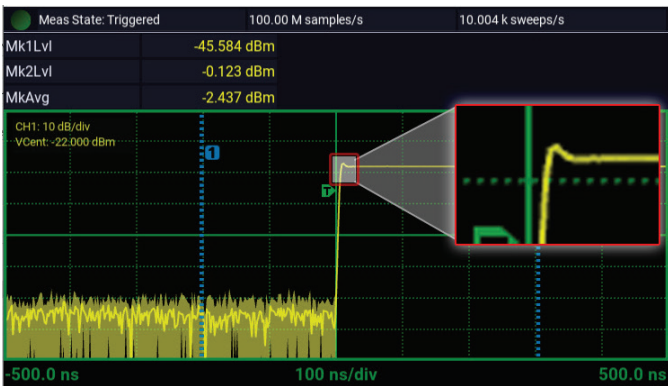

**Industry-leading rise time (< 3 ns)** enables characterization of the most demanding radar signals.

Utilize the **superior 100 ps time resolution** to zoom and uncover signal characteristics that might otherwise be missed.

Param	CH1	CH2
Width	30.080 $\mu$ s	30.012 $\mu$ s
Rise	21.061 $\mu$ s	21.132 $\mu$ s
Fall	22.395 $\mu$ s	23.404 $\mu$ s
Period	999.77 $\mu$ s	999.89 $\mu$ s
PRF	1.0002 kHz	1.0001 kHz
Duty	3.01%	3.00%
Offtime	969.69 $\mu$ s	969.88 $\mu$ s
WavAv	-14.158 dBm	-5.348 dBm
PulsAv	0.484 dBm	9.445 dBm
PulsPk	1.327 dBm	10.098 dBm
OvrSht	0.290 dB	0.110 dB

Users can take advantage of the ML2439A automated pulse measurement feature to measure and calculate 16 common power and timing parameters and display the parameters of interest: rise-time, fall time, pulse width, off-time, period, pulse repetition frequency, duty cycle, pulse peak, pulse overshoot, pulse average, waveform average, top level power, droop, bottom level power, edge delay, and pulse edge skew between channels.


## Power Expert Functionality

### Power Analyzer (MA24400A Sensors)

Power Analyzer is a complimentary PC-Based software application for sensor control, measurement configuration, and advanced analysis.

#### Key Features and Functionality

- Data displayed as numerical meter or waveform trace
- Statistical analysis with CCDF plot
- Multiple marker measurements, including between marker data and marker ratios
- Automated measurements; e.g., 16 automated pulse measurements
- Export measurement data in .csv or .pdf formats
- Up to eight simultaneous power measurement channels
- Simulation mode available to preview functionality when a sensor is not available

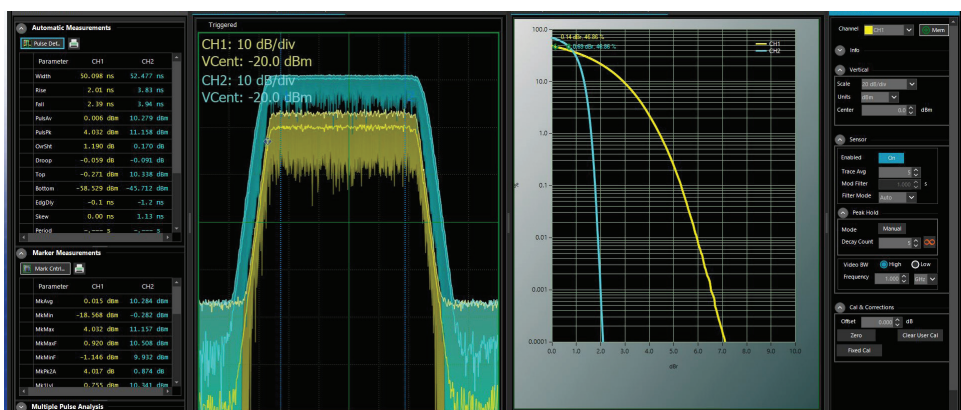


### PowerXpert (MA24100A, MA24200A and MA24300A Sensors)



PowerXpert is a complimentary PC based application which supports all Anritsu power sensors.

#### Key Features and Functionality

- Multiple Sensor Display – Up to 8 sensors
- Data displayed as numerical meter or waveform trace
- Continuous Mode, Time Slot Mode, Scope Mode and List Mode
- Gate and Fence mode to measure select portion of the waveform (Sensor dependent)
- Up to 1000 measurements with different settings for each measurement (sensor dependent)
- Standby Auto Arm, Single Arm and Multi Arm trigger states
- Screen capture and data logging

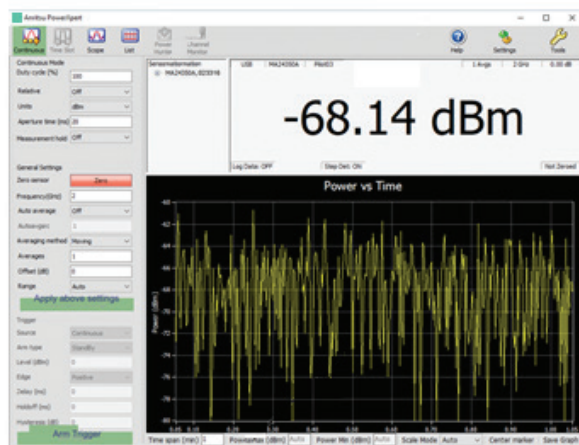

# Power Expert Functionality

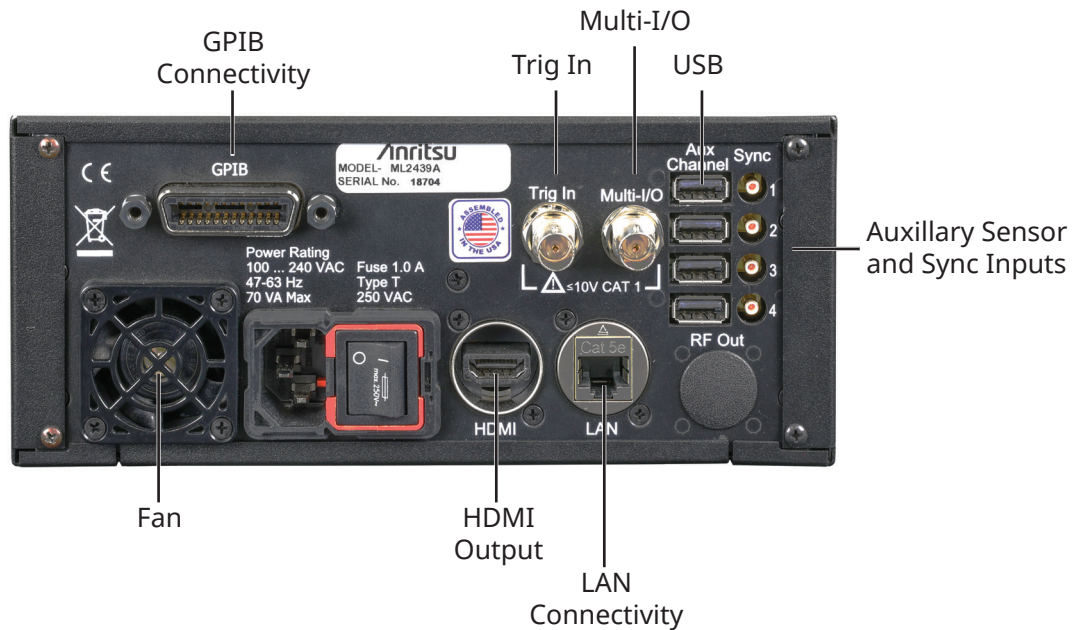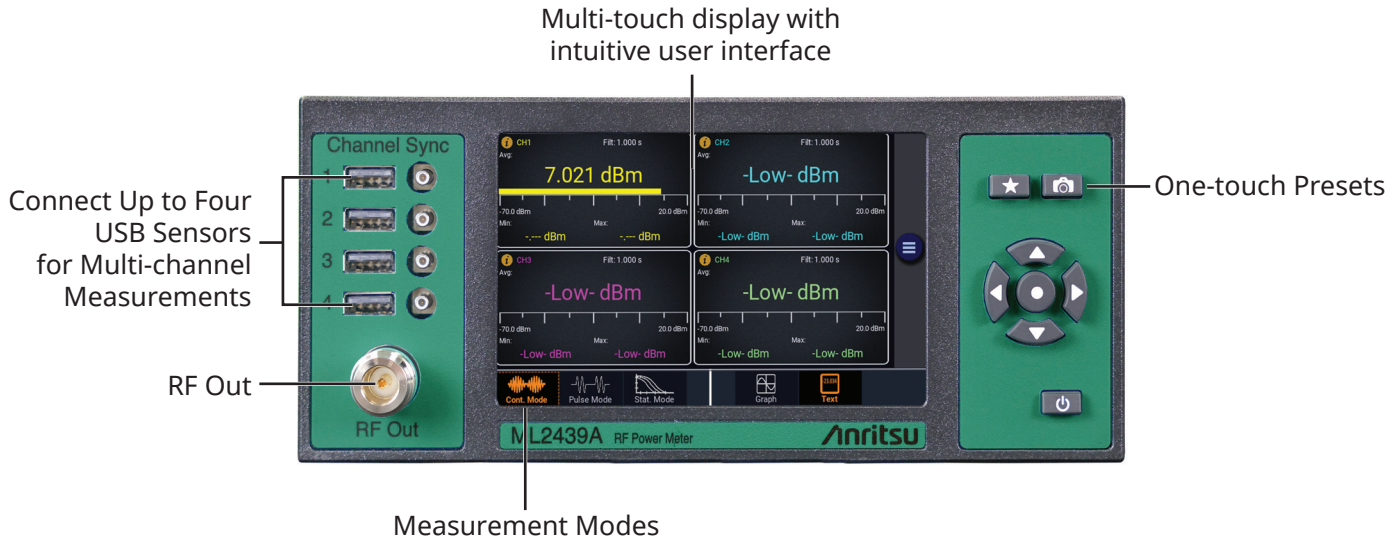

## ML2439A Power Meter

---

### Ordering Information

Model Number	Description
ML2439A	Power Meter, 2-Channel

#### Options

ML2439A-0004	Add Two Active Channels
ML2439A-1004	Retrofit, Add Two Active Channels
ML2439A-0005	GPIB Interface
ML2439A-1005	Retrofit, GPIB Interface
ML2439A-0006	External USB Boot
ML2439A-1006	Retrofit, External USB Boot

#### Standard Accessories

Part Number	Description
11410-00976	Information Card (provides information on where to download the latest manual, software, utilities)

#### Standard Accessories

Part Number	Description
2000-2154-R	External USB Drive (for Option -0006)
2000-2155-R	19" Rack Mount Kit

---

- **United States**

- **Anritsu Americas Sales Company**

490 Jarvis Drive, Morgan Hill, CA 95037-2809, U.S.A.  
Phone: (408)-778-2000

- **Canada**

- **Anritsu Electronics Ltd.**

- **Americas Sales and Support**

490 Jarvis Drive, Morgan Hill, CA 95037-2809, U.S.A.  
Phone: +1-800-Anritsu (1-800-267-4878)

- **Brazil**

- **Anritsu Eletrônica Ltda.**

Praça Amadeu Amaral, 27 - 1 Andar  
01327-010 - Bela Vista - Sao Paulo - SP, Brazil  
Phone: +55-11-3283-2511

- **Mexico**

- **Anritsu Company, S.A. de C.V.**

Bldv Miguel de Cervantes Saavedra #169 Piso 1, Col. Granada  
Mexico, Ciudad de Mexico, 11520, MEXICO  
Phone: +52-55-4169-7104

- **United Kingdom**

- **Anritsu EMEA Limited**

900 Capability Green, Luton, Bedfordshire, LU1 3LU, U.K.  
Phone: +44-1582-433200

- **France**

- **Anritsu SA**

12 avenue du Québec, Immeuble Goyave,  
91140 VILLEBON SUR YVETTE, France  
Phone: +33-1-60-92-15-50

- **Germany**

- **Anritsu GmbH**

Nemetschek Haus, Konrad-Zuse-Platz 1,  
81829 München, Germany  
Phone: +49-89-442308-0

- **Italy**

- **Anritsu S.R.L.**

Spaces Eur Arte, Viale dell'Arte 25, 00144 Roma, Italy  
Phone: +39-6-509-9711

- **Sweden**

- **Anritsu AB**

Kistagången 20 B, 2 tr, 164 40 Kista, Sweden  
Phone: +46-8-534-707-00

- **Finland**

- **Anritsu AB**

Technopolis Aviapolis, Teknobulevardi 3-5 (D208.5.),  
FI-01530 Vantaa, Finland  
Phone: +358-20-741-8100

- **Denmark**

- **Anritsu A/S**

c/o Regus Winghouse, Ørestads Boulevard 73, 4th floor,  
2300 Copenhagen S, Denmark  
Phone: +45-7211-2200

- **Spain**

- **Anritsu EMEA GmbH**

- **Representation Office in Spain**

Calle Manzanares 4, Primera planta, 28005 Madrid, Spain  
Phone: +34-91-572-6761

- **Austria**

- **Anritsu EMEA GmbH**

Am Belvedere 10, A-1100 Vienna, Austria  
Phone: +43-(0)1-717-28-710

- **United Arab Emirates**

- **Anritsu A/S**

Office No. 164, Building 17, Dubai Internet City  
P. O. Box – 501901, Dubai, United Arab Emirates  
Phone: +971 (0) 4-2424919

- **India**

- **ANRITSU INDIA PRIVATE LIMITED**

6th Floor, Indiquebe ETA, No.38/4, Adjacent to EMC2,  
Doddanekundi, Outer Ring Road, Bengaluru – 560048, India  
Phone: +91-80-6728-1300  
Fax: +91-80-6728-1301

- **Singapore**

- **ANRITSU PTE LTD**

1 Jalan Kilang Timor, #07-04/06 Pacific Tech Centre  
Singapore 159303  
Phone: +65-6282-2400

- **Vietnam**

- **ANRITSU COMPANY LIMITED**

16th Floor, Peakview Tower, 36 Hoang Cau Street, O Cho Dua Ward,  
Hanoi, Vietnam  
Phone: +84-24-3201-2730  
Fax: +84-24-3201-2740

- **P.R. China (Shanghai)**

- **Anritsu (China) Co., Ltd.**

Room 2301-2303, Tower A, New Caohejing International Business  
Center No. 391 Gui Ping Road, Shanghai, 200233, P.R. China  
Phone: +86-21-6237-0898

- **P.R. China (Hong Kong)**

- **ANRITSU COMPANY LIMITED**

Unit 1302, 13<sup>th</sup> Floor, New East Ocean Center,  
No.9 Science Museum Road, TsingShaTsui East,  
Kowloon, Hong Kong  
Phone: +852-2301-4980

- **Japan**

- **ANRITSU CORPORATION**

8-5, Tamura-cho, Atsugi-shi, Kanagawa, 243-0016 Japan  
Phone: +81-46-296-1244  
Fax: +81-46-296-1239

- **Korea**

- **Anritsu Corporation Limited**

8F, A TOWER, 20, Gwacheondaero 7-gil, Gwacheon-si,  
Gyeonggi-do, 13840, Republic of Korea  
Phone: +82-2-6259-7300

- **Australia**

- **Anritsu Pty Ltd**

Unit 20, 21-35 Ricketts Road, Mount Waverley, Victoria 3149, Australia  
Phone: +61-3-9558-8177

- **Taiwan**

- **ANRITSU COMPANY, INC.**

7F, No. 316, Sec. 1, NeiHu Rd., Taipei 114, Taiwan  
Phone: +886-2-8751-1816

List Revision Date: 20251202



Anritsu utilizes recycled paper and environmentally conscious inks and toner.



© Anritsu All trademarks are registered trademarks of their respective owners. Data subject to change without notice. For the most recent specifications visit: [www.anritsu.com](http://www.anritsu.com)