

P X B S E R I E S



Bidirectional High-Capacity DC Power Supply
PXB Series

NEW

High power density: 20 kW in 3U size

A single unit handles both power and regeneration

Rated output voltage 50 V/ 250 V/ 500 V/ 1000 V/ 1500 V

Select input voltage from 200 Vac (3-phase) or 400 Vac (3-phase)

Continuous operation at rated power at ambient temperature of 50°C (Excluding some models)

Up to 25 units (500 kW) can be operated in parallel

Equipped with touch panel display

LAN, USB, RS232C, external analog control (isolated type) standard

Regenerative function (on-site)

External control I/O is standard for both NPN and PNP type PLCs




<https://global.kikusui.co.jp/>

For the Progressive "X" electric applications

A better power supply testing environment, for an increasingly electric and electronic world. Our goal was to create a bidirectional power supply that can flexibly respond to various "X" requirements related to advanced technology!

The PXB series of bidirectional high-capacity DC power supplies condenses a 20 kW large-capacity output into a 3U-size chassis. Not only handling high voltages of 1500 V, but also capable of both power and regeneration in both directions in a single unit. We provide a new power supply test environment for electrical and electronic equipment that is becoming increasingly high-powered. In addition, a variety of analog, digital, and communication interfaces are provided for optimal operation at any stage of research, development, and manufacturing! A new generation of bidirectional DC power supplies that support the progression of advanced technologies.

Bidirectional

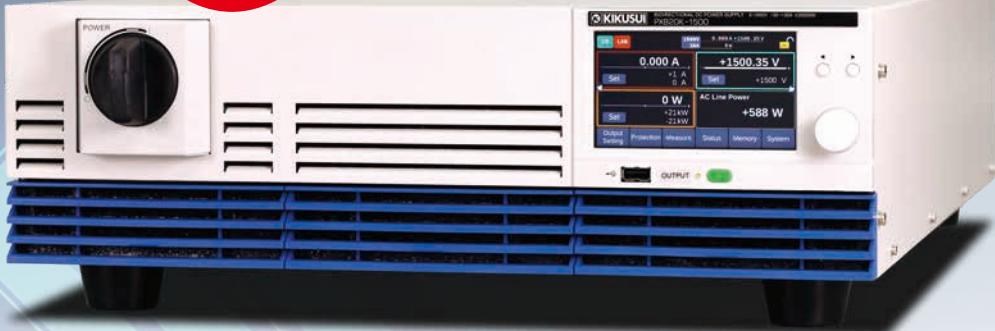

Bidirectional High-Capacity DC Power Supply

PXB Series

NEW

Features

- High power density: 20 kW in 3U size
- A single unit handles both power and regeneration
- Rated output voltage 50 V/ 250 V/ 500 V/ 1000 V/ 1500 V
- Select a model with an input voltage from 200 Vac (3-phase) or 400 Vac (3-phase)
- Continuous operation at rated power at ambient temperature of 50°C (Excluding some models)
- Up to 25 units (500 kW) can be operated in parallel
*Please contact us if you wish to operate more than 10 units in parallel.
- Equipped with touch panel display
- LAN, USB, RS232C, external analog control (isolated type) standard
- Regenerative function (on-site)
- External control I/O is standard for both NPN and PNP type PLCs

20kW Maximum voltage
1500V

3U
Approx. 128 mm (5.04 inches)

Lineup / Main Specifications

Model	Output			Ripple noise		Power fluctuation		Load variation	
	CV	CC *	Rated power	CV (rms)	CV	CC	CV	CC	
PXB20K-50	0 V to 50 V	-800 A to +800 A	20 kW	30 mV	±10 mV	±1600 mA	±40 mV	±1600 mA	
PXB20K-250	0 V to 250 V	-200 A to +200 A		125 mV	±50 mV	±400 mA	±125 mV	±400 mA	
PXB20K-500	0 V to 500 V	-120 A to +120 A		250 mV	±100 mV	±240 mA	±250 mV	±240 mA	
PXB20K-1000	0 V to 1000 V	-60 A to +60 A		500 mV	±200 mV	±120 mA	±500 mV	±120 mA	
PXB20K-1500	0 V to 1500 V	-30 A to +30 A		750 mV	±300 mV	±60 mA	±750 mV	±60 mA	

Model	Rise time / Fall time				Input current		Weight	
	CV		CC		AC 200 V (3-phase 3-wire) / 400 V (3-phase 3-wire)			
	Rise time	Fall time	Rise time (Short-circuit) (TYP)	Fall time (Short-circuit) (TYP)	* Select type at purchase. Switching not possible.			
PXB20K-50	10 ms	5 ms			80 A / 40 A		41 kg (90.39 lbs)	
PXB20K-250							39 kg (85.98 lbs)	
PXB20K-500							38 kg (83.78 lbs)	
PXB20K-1000							37 kg (81.57 lbs)	
PXB20K-1500							37 kg (81.57 lbs)	


*The minimum voltage at which the maximum Sink is possible is 6 % of the rated voltage for the PXB20K-50, and 2 % of the rated voltage for other models.

● Output power range

2 to 3 times mains-powered operation


Mains-powered power supply with a wide range of operating ranges and combinations of voltage and current settings. If the voltage of the connected DUT is lower than the voltage setting of the PXB series, current flows from the PXB series to the DUT. If the voltage of the connected DUT is higher than the voltage setting of the PXB series, current flows from the DUT to the PXB series.

Conceptual diagram of operating area

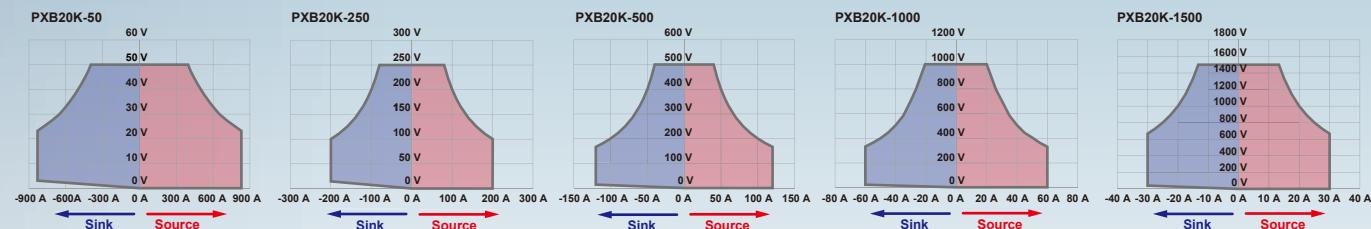


● Achieves high-speed rise and fall times

Achieves a rise/fall time of 10 ms, which is several tens of times faster than conventional switching power supplies. Enabling high-speed power fluctuation testing that cannot be handled by ordinary DC power supplies.




CV operation: at no load



CC operation: at short circuit

● Highly stable operation with high resistance to capacitive loads

Designed for highly stable operation, without oscillation or overshoot even when a load with a large capacitive component is connected. Slew rate and response can be varied to match the characteristics of the connected load, suppressing oscillation and overshoot.

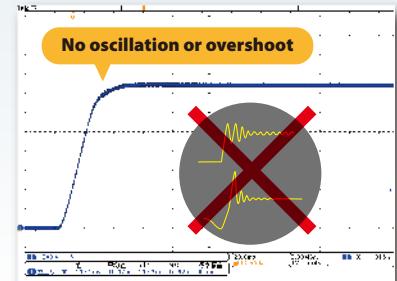

Output voltage waveform with 400 μ F capacitor connected

● Applications

Inverter and motor evaluation test




Aging tests for bidirectional DC/DC converters




● Optimized for different purposes and applications, with selectable response speeds

Required response speed of power supply equipment varies depending on test conditions and load specifications. The PXB series can change the response speed of the power supply as desired to suit the application.

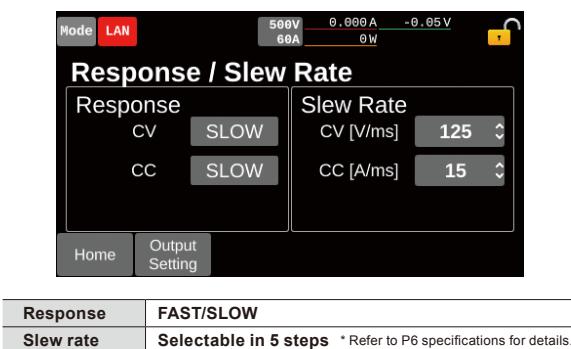

● Up to 25 units can be operated in parallel, achieving 500 kW*

Intake and exhaust on the front and back only, allowing for close mounting

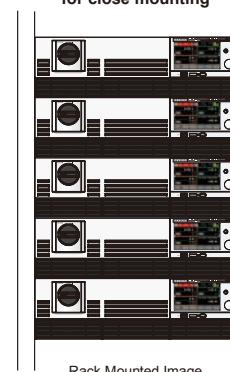


Rack Mounted Image

Including master machine, up to 25 units (500 kW) can be operated in parallel. Connection is with one-control parallel operation, and the panel of the master machine can control and display the entire system. With the automatic recognition function, the need for complicated settings is eliminated, allowing the construction of high-capacity systems.

* Parallel operation is possible between models with different input rated voltages.

Please contact us if you wish to operate more than 10 units in parallel.

Connection conceptual diagram

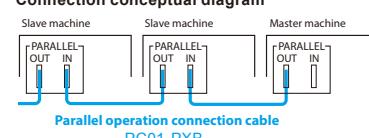


Performance / Functions

● Priority operation mode

Mode of operation can be set, as constant voltage (CV), constant current (CC), or constant power (CP), when output is turned on. Overshoot can be prevented by setting CC mode priority when batteries, power supplies, etc. are connected.

● Pulse function / Sign function


"Pulse" operation can be set, which repeatedly executes a binary setting, or "sine" operation, changing the current in a sinusoidal manner.

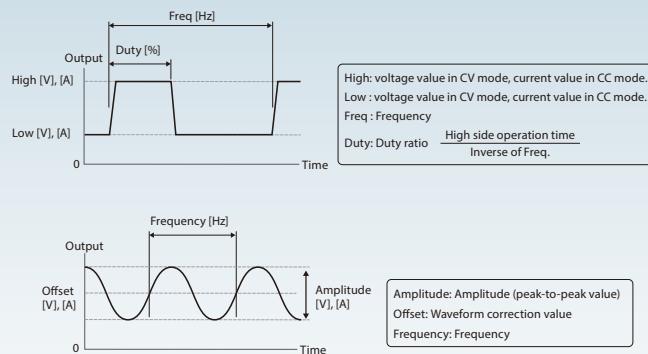

● Regenerative function (on-premises) contributes to carbon neutrality.

When power is regenerated to the main unit from an inverter or battery, the load power is converted to reusable power and regenerated to the AC LINE. This can contribute to reducing the amount of heat exhaust and saving energy.

*Regenerative efficiency of over 90% (at rated load).

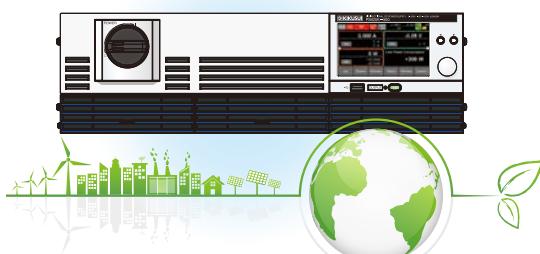

* The PXB series is designed for on-site regeneration.
Use in an environment where the power on-site is greater than the regenerative power.

● Equipped with touch panel display


By pressing or swiping a finger on the display, on-screen items can be selected, or numerical values set.

The display is pressure-sensitive and can be operated even with gloves.



● Sequence function

Preset operations can be run continuously. Total of 30 programs, and up to 10,000 steps can be created for all programs. Programs stored in the unit's memory, and data can be exported to a USB memory stick from the front panel.

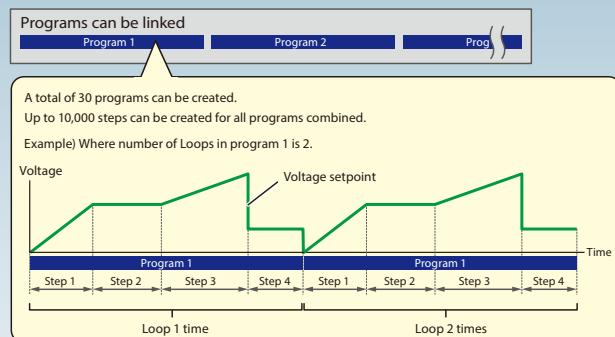

● SEAM mode

Equipped with SEAM mode allowing current to flow in both directions without changing voltage values. Suitable for charging and discharging storage batteries. Can suppress current overshoots and undershoots which may often occur during operation mode switching after charge/discharge.



DC SEAM mode operation example

● Selectable power input

Full output at rated power regardless of input voltage. Choose from 3-phase 3-wire 200 V or 400 V models. No output limitation for either input voltage.



● Reliable and solid performance even under high temperatures

Solid performance under operating temperatures of 0°C to 50°C. Exhibits full performance even in environments with severe ambient temperatures, such as when installed in equipment. (Excluding some models.)

Caution: PXB20K-50 and PXB20K-250 operates in the temperature range of 0°C to +40°C.

● Safety Protection Function

- OVP (Over voltage protection)
- OPP (Over power protection)
- UVP (Under voltage protection)
- OCP (Over current protection)
- WDOG (Communication error protection)
- EXT LOW (External input alarm detection)

● External control function

The EXT CONT connector on the rear panel can be used to control the PXB series with external devices. The general-purpose digital input and output terminals can be assigned any function, facilitating system construction in combination with other measurement devices. Digital I/O standard for both NPN and PNP type PLCs. Analog I/O is isolated from output terminals as standard, allowing safe analog control from PLC.



Terminal No.	Method	I/O	Name	Description
1	Digital	O	OUT Ch.1	General-purpose output terminal
2	Digital	O	OUT Ch.2	General-purpose output terminal
3	Digital	O	OUT Ch.3	General-purpose output terminal
4	—	—	DO COM	Digital output common
5	—	—	DI COM	Digital input common
6	Digital	I	IN Ch.1	General-purpose input terminal
7	Digital	I	IN Ch.2	General-purpose input terminal
8	Digital	I	IN Ch.3	General-purpose input terminal
9	—	O	+12 V OUT	12 V reference voltage available for digital input
10	—	—	—	Not used
11	—	—	A COM	Analog signal common
12	Analog	O	VMON	Voltage monitor
13	Analog	O	IMON	Current monitor
14	Digital	O	OUT Ch.4	General-purpose output terminal
15	Digital	O	OUT Ch.5	General-purpose output terminal
16	Digital	O	OUT Ch.6	General-purpose output terminal
17	—	—	DO COM	Digital output common
18	—	—	DI COM	Digital input common
19	Digital	I	IN Ch.4	General-purpose input terminal
20	Digital	I	IN Ch.5	General-purpose input terminal
21	Digital	I	H ALARM IN	HIGH alarm EXT HIGH occurrence
22	—	—	12 V COM	12 V reference voltage common
23	—	—	A COM	Analog signal common
24	Analog	I	EXT CV	Voltage control in the constant voltage mode
25	Analog	I	EXT CC/CP	Current control in the constant current / power modes

Method	Function
Analog input	Setting of voltage and current values
Analog output	Monitoring of voltage and current values
General-purpose isolated digital input (Ch.1 to ch.5) *Photocoupler isolated input (Supports both current sink and source)	<ul style="list-style-type: none"> Output ON/OFF from DC OUTPUT terminal LOW alarm generation / deactivation Start / Stop totalizer measurement Reset totalized value Measurement trigger input Preset memory recall
Digital input (Ch.6)	HIGH alarm generation (Fixed)
General-purpose isolated digital output (Ch.1 to ch.6) *Semiconductor relay output	<ul style="list-style-type: none"> Monitor output status of DC OUTPUT terminal Power-on monitor Alarm monitoring Operating mode monitoring Preset memory monitoring

General-purpose isolated digital input terminals are available from Ch.1 to Ch.5. Any setting value from the items listed on the right can be selected.




* Ch.6 is fixed at "H Alarm IN".

General-purpose isolated digital output terminals are available from Ch.1 to Ch.6. Any setting value from the items listed on the right can be selected.



● Variable internal resistance function


Function can change the output voltage value in constant voltage operation, according to the output current value based on the set resistance value. Simple simulation of Internal resistance of rechargeable batteries and wire harnesses etc.

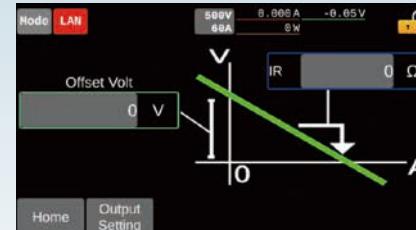

Range of settings	PXB20K-50	0 mΩ to 63 mΩ
	PXB20K-250	0 mΩ to 1575 mΩ
	PXB20K-500	0 mΩ to 5250 mΩ
	PXB20K-1000	0 mΩ to 21000 mΩ
	PXB20K-1500	0 mΩ to 63000 mΩ


● I-V characteristic function

By registering multiple arbitrary points on the I-V characteristics, arbitrary I-V characteristics can be set for each CC and CV operation mode. Arbitrary points can be registered from 3 to 100, making it possible to simulate the I-V characteristics of rechargeable batteries and other devices.

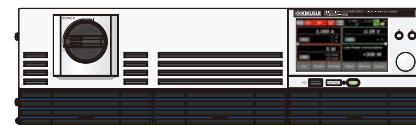

PXB20K-1000 CC mode setting example

Score	Voltage [V]	Current [A]
1	0	20.000
2	300	20.000
3	360	18.000
4	400	16.000
5	500	10.000
6	600	0.000
7	1050	0.000

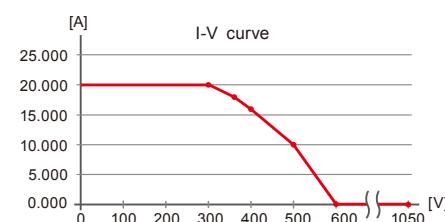

Specifications

Unless specified otherwise, the specifications are for the following settings and conditions.

• The product is warmed up for at least 30 minutes.

The used terminology is as follows:

• TYP: These are typical values that are representative of situations where the product operates in an environment with an ambient temperature of 23°C (73.4°F). These values do not guarantee the performance of this product. • setting: Indicates a setting. • reading: Indicates a readout value. • rating: Indicates a rated value. • Open: Indicates equivalence to the state in which the DC OUTPUT terminals are opened. • +, -: + sign indicates source, - sign indicates sink. • Vout: Indicates an output voltage.

Output rating

Item	PXB20K-50	PXB20K-250	PXB20K-500	PXB20K-1000	PXB20K-1500
Rated power	±20000 W	±20000 W	±20000 W	±20000 W	±20000 W
Rated voltage (source) *1	0 V to 50 V	0 V to 250 V	0 V to 500 V	0 V to 1000 V	0 V to 1500 V
Operating voltage (sink) *2	3 V to 50 V	15 V to 250 V	10 V to 500 V	20 V to 1000 V	30 V to 1500 V
Rated current *1	±800 A	±200 A	±120 A	±60 A	±30 A

*1. Limited by the maximum output power.

*2. Operating voltage at which the rated sink current can be applied.

Output voltage

Item	PXB20K-50	PXB20K-250	PXB20K-500	PXB20K-1000	PXB20K-1500
Maximum settable voltage	52.5 V	262.5V	525 V	1050 V	1575 V
Setting accuracy			±(0.2 % of setting + 0.1 % of rating)		
Setting resolution	0.005 V	0.02 V	0.05 V	0.1 V	0.1 V
Power fluctuation *1	±10 mV	±50 mV	±100 mV	±200 mV	±300 mV
Load variation *2	±40 mV	±125 mV	±250 mV	±500 mV	±750 mV
Remote sensing			10 % of rating		
Maximum compensation voltage (reciprocating)					
Internal resistance setting upper limit	63 mΩ	1575 mΩ	5250 mΩ	21000 mΩ	63000 mΩ
Internal resistance setting resolution	1 mΩ	1 mΩ	1 mΩ	2 mΩ	5 mΩ
Response switching			FAST, SLOW		
Slew rate switching (TYP)	12.5 V/ms or more *3	62.5 V/ms or more *3	125 V/ms or more *3	250 V/ms or more *3	375 V/ms or more *3
	12.5 V/ms	62.5 V/ms	125 V/ms	250 V/ms	375 V/ms
	1.25 V/ms	6.25 V/ms	12.5 V/ms	25 V/ms	37.5 V/ms
	0.125 V/ms	0.625 V/ms	1.25 V/ms	2.5 V/ms	3.75 V/ms
	0.0125 V/ms	0.0625 V/ms	0.125 V/ms	0.25 V/ms	0.375 V/ms
Source only *4	Transient response *5	8 ms or less	8 ms or less	8 ms or less	10 ms or less
	Ripple noise *6	p-p *7	250 mV	375 mV	1500 mV
		rms *8	30 mV	125 mV	500 mV
	Rise time *9	Full load *10		10 ms	
		No load		10 ms	
	Fall time *11	Full load *10		10 ms	
		No load		10 ms	

*1. 180 Vac to 252 Vac for 200 Vac input, 342 Vac to 504 Vac for 400 Vac input. At the constant load.

*2. The amount of change that occurs when the load is changed from no load to full load (rated output power/rated output voltage) with rated output voltage.

The value is measured at the sensing point.

*3. MAX will appear on the display.

*4. In the case that the CV mode response setting is set to FAST.

*5. The amount of time required for the output voltage to return to a value within "rated output voltage ±(0.1 % + 10 mV)."

The load current fluctuation is 50 % to 100 % of the maximum current with the set output voltage.

*6. At the rated output current. Values measured using JEITA RC-9131C probe and 100:1 probe.

*7. Measurement frequency band: 10 Hz to 20 MHz

*8. Measurement frequency band: 10 Hz to 1 MHz

*9. 10 % to 90 % of the rated output voltage.

*10. For a pure resistance.

*11. 90 % to 10 % of the rated output voltage.

Output current

Item	PXB20K-50	PXB20K-250	PXB20K-500	PXB20K-1000	PXB20K-1500
Settable maximum source current *1	+840 A	+210 A	+126 A	+63 A	+31.5 A
Settable maximum sink current *1	-840 A	-210 A	-126 A	-63 A	-31.5 A
Seamless setting current range *1	-840 A to +840 A	-210 A to +210 A	-126 A to +126 A	-63 A to +63 A	-31.5 A to +31.5 A
Setting accuracy			±(0.75 % of rating)		
Setting resolution	0.1 A	0.02 A	0.01 A	0.005 A	0.002 A
Power fluctuation	±1600 mA	±400 mA	±240 mA	±120 mA	±60 mA
Load variation	±1600 mA	±400 mA	±240 mA	±120 mA	±60 mA
Rise time (Short-circuit) (TYP) *2			5 ms		
Fall time (Short-circuit) (TYP) *3			5 ms		
Charge/discharge switching time (TYP)			10 ms		
Response switching			FAST, SLOW		
Slew rate switching (TYP) *1	200 A/ms or more *4	50 A/ms or more *4	30 A/ms or more *4	15 A/ms or more *4	7.5 A/ms or more *4
	200 A/ms	50 A/ms	30 A/ms	15 A/ms	7.5 A/ms
	20 A/ms	5 A/ms	3 A/ms	1.5 A/ms	0.75 A/ms
	2 A/ms	0.5 A/ms	0.3 A/ms	0.15 A/ms	0.075 A/ms
	0.2 A/ms	0.05 A/ms	0.03 A/ms	0.015 A/ms	0.0075 A/ms

*1. During parallel operation, this will be the value multiplied by the number of units in the configuration.

*2. In the case that the CC mode response setting is set to FAST: Applied in response to changes from 10 % to 90 % of rated output current.

*3. In the case that the CC mode response setting is set to FAST: Applied in response to changes from 90 % to 10 % of rated output current.

*4. MAX will appear on the display.

Output power

Item	Common to all models				
Settable maximum source power *1	+21000 W				
Settable maximum sink power *1	-21000 W				
Seamless setting power range *1	-21000 W to +21000 W				
Setting accuracy *2	±(0.5 % of power rating + 0.5 % of current rating × Vout)				
Setting resolution	2 W				

*1. During parallel operation, this will be the value multiplied by the number of units in the configuration.

*2. Equal to or higher than 5 % of the rated power is guaranteed. Less than 5 % of the rated power is guaranteed as a TYP value.

Specifications

200 V three-phase three-wire input

Specifications for models having an input voltage rating of 200 Vac.

Item	Common to all models
Nominal input rating	200 Vac to 240 Vac, 50 Hz to 60 Hz
Input voltage range	180 Vac to 252 Vac
Input frequency range	47 Hz to 63 Hz
Input current (MAX) *1	80 A (180 V)
Input power (MAX) *1	24 kVA
Inrush current (TYP) *2	90 A
Power factor (TYP) *1	0.96
Output hold time	10 ms or more

*1. At the rated output power for the rated output current.

*2. Maximum peak current value when the POWER switch is turned on. (Excluding the surge current to the input filter capacitor.)

400 V three-phase three-wire input

Specifications for models having an input voltage rating of 400Vac.

Item	Common to all models
Nominal input rating	380 Vac to 480 Vac, 50 Hz to 60 Hz
Input voltage range	342 Vac to 504 Vac
Input frequency range	47 Hz to 63 Hz
Input current (MAX) *1	40 A (342 V)
Input power (MAX) *1	24 kVA
Inrush current (TYP) *2	70 A
Power factor (TYP) *1	0.96
Output hold time	10 ms or more

*1. At the rated output power for the rated output current.

*2. Maximum peak current value when the POWER switch is turned on. (Excluding the surge current to the input filter capacitor.)

Display

Item	PXB20K-50	PXB20K-250	PXB20K-500	PXB20K-1000	PXB20K-1500
Voltmeter	Maximum display	±60.000 V	±300.000 V	±600.00 V	±1200.00 V
	Display accuracy			±(0.1 % of reading + 0.2 % of rating)	
Ammeter	Maximum display	±1120.000 A	±336.000 A	±168.000 A	±84.000 A
	Display accuracy			±(0.75 % of rating)	
Wattmeter	Maximum display *1			±24.000 kW	
	Display accuracy			Display the integrated value of voltmeter and ammeter	
Operation display	Output ON / OFF			The OUTPUT LED on the front panel lights in green	
	Operation mode			Indicate the followings on the upper left part of the display CV: Green CV icon, CC: Red CC icon, CP: Orange CP icon	
	Remote (LAN)			Indicate the followings on the upper left part of the display Not connected: Red LAN icon, Preparing for connection: Orange LAN icon, Connected: Green LAN icon	
	Alarm			Indicate the details of activated protection function on the display	
	SCPI error			Indicate the error occurring at present on the display	
	POWER off			Indicate residual charge warning and an instruction to turn off the display, then reboot	
	Key lock			Indicate the key lock status on the upper right part of the display	
	Sensing			When sensing is enabled, indicate the sensing icon on the upper right part of the display	
	During parallel operation			Displaying the slave state on the slave unit	
	External control			When digital input/output is enabled, indicate the EXT icon on the upper right part of the display	

*1. The unit will be W if it is less than 10 kW.

Protection function LOW alarm

An alarm not requiring a reboot to be cleared.

Item	PXB20K-50	PXB20K-250	PXB20K-500	PXB20K-1000	PXB20K-1500
OVP (overvoltage protection)	Protection operation				
	Setting range	5 V to 55 V	25 V to 275 V	50 V to 550 V	100 V to 1100 V
	Setting accuracy			±(0.1 % of setting + 0.2 % of rating)	
	Setting resolution	0.005 V	0.02 V	0.05 V	0.1 V
OCP (overcurrent protection)	Protection operation				
	Setting range (Source) *1	80 A to 880 A	20 A to 220 A	12 A to 132 A	6 A to 66 A
	Setting range (Sink) *1	-80 A to -880 A	-20 A to -220 A	-12 A to -132 A	-6 A to -66 A
	Setting accuracy			±(0.75 % of rating)	
	Setting resolution	0.1 A	0.02 A	0.01 A	0.005 A
OPP (overpower protection)	Protection operation				
	Setting range (Source) *1			Output off, indicate "OPP" on the display. SLV OPP is displayed on the slave unit.	
	Setting range (Sink) *1			2 kW to 24 kW	
	Setting accuracy			-2 kW to -24 kW	
	Setting resolution			±(1.0 % of power rating + 1.0 % of current rating × Vout)	
UVP (undervoltage protection)	Protection operation				
	Setting range	0 V to 50 V	0 V to 250 V	0 V to 500 V	0 V to 1000 V
	Selectable			Enable/Disable	
	Setting accuracy			±(0.1 % of setting + 0.2 % of rating)	
	Protection operation				
Watchdog Alarm (Communication error protection)	Setting range			Output off, indicate "WDOG" on the display	
	Selectable			1 s to 3600 s	
	Selectable			Enable/Disable	
External Alarm LOW Level (external input alarm detection)	Protection operation			Output off, indicate "EXT LOW" on the display	

*1. During parallel operation, this will be the value multiplied by the number of units in the configuration.

Specifications

Protection function HIGH alarm

An alarm requiring a reboot to be cleared.

Item	Common to all models	
Reverse Alarm (Reverse-connection detection protection)	Protection operation	Output off, indicate "REVE" on the display
OHP (Overheat protection)	Protection operation	Output off, indicate "OHP" on the display. SLV OHP is displayed on the slave unit.
Line OVP (Grid overvoltage protection)	Protection operation	Output off, indicate "LOVP" on the display. SLV LOVP is displayed on the slave unit.
	Setting range	Input voltage rating 200 Vac model: 200 V to 258 V Input voltage rating 400 Vac model: 380 V to 516 V
Line UVP (Grid undervoltage protection)	Protection operation	Output off, indicate "LUVP" on the display. SLV LUVP is displayed on the slave unit.
	Setting range	Input voltage rating 200 Vac model: 175 V or less. Input voltage rating 400 Vac model: 333 V or less.
Line Frequency Error (Grid abnormal frequency protection)	Protection operation	Output off, indicate "FREQ" on the display. SLV FREQ is displayed on the slave unit.
	Detection value	42 Hz/68 Hz
External Alarm HIGH Level (External input alarm detection)	Protection operation	Output off, indicate "EXT HIGH" on the display
SENS Alarm (incorrect sensing connection detection)	Protection operation	Output off, indicate "SENS" on the display
	Setting range	Enable/Disable
Parallel Communication Error (Parallel operation communication error detected)	Protection operation	Output off, indicate "PARA COM" on the display
Para Other Slave Alarm (Parallel operation slave error occurred)	Protection operation	Output off, indicate "SLV OTHR" on the display
Incorrect Slave Alarm (Not applicable device connected)	Protection operation	Output off, indicate "SLV INC" on the display
Too many connections (Too many parallel connections)	Protection operation	Output off, indicate "TOO MANY" on the display
Hardware ERR *1 (Hardware error)	Protection operation	Output off, indicate "ERRH" on the display. SLV ERRH is displayed on the slave unit.
Software ERR *2 (Software error)	Protection operation	Output off, indicate "ERRS" on the display. SLV ERRS is displayed on the slave unit.

*1. It occurs when an abnormality related to the hardware is detected and the internal unit comes to an emergency stop.

*2. It occurs when an abnormality related to the software is detected and the internal unit comes to an emergency stop.

External analog I/O

Item	Common to all models	
Input	Input points	2 points
	Voltage (CV) control	Setting range 0 % to 100 % of the rated output voltage Input voltage range 0 V to +5 V or 0 V to +10 V (Selectable)
		Accuracy $\pm(1\% \text{ of rating})$
	Current (CC) control Power (CP) control *1	Setting range -100 % to +100 % of the rated current and rated power Input voltage range -5 V to +5 V or -10 V to +10 V (Selectable)
		Accuracy $\pm(1\% \text{ of rating})$
	Output points	2 points
Output	Voltage monitor (VMON)	Monitor range 0 % to +100 % of the rated output voltage Output voltage range 0 V to +5 V or 0 V to +10 V (Selectable)
		Accuracy 1 % of rating
	Current monitor (IMON)	Monitor range -100 % to +100 % of the rated output voltage Output voltage range -5 V to +5 V or -10 V to +10 V (Selectable)
		Accuracy $\pm(1\% \text{ of rating})$

*1. Select either current control or power control.

External digital input

Item	Common to all models	
Fixed input points		1 point (Polarity switchable)
Selected input points		5 points (Polarity switchable)
Input form	Photocoupler isolated input (Applicable to both current sink / source output)	
Fixed function	ALARM IN	HIGH alarm occurrence
	OFF	Do not use terminals
	OUTPUT ON	Turn on the output
	OUTPUT OFF	Turn off the output
	OUTPUT CTRL	Turn on or off the output
	L ALARM IN	LOW alarm occurrence
	ALARM CLR	LOW alarm clearance
	SEQ RUN	Sequence start/end
	SEQ PAUSE	Sequence pause/resume
	INTEG CTRL	Starting/stopping integration measurement
	INTEG RESET	Resetting integration measurement data
	ACQUIRE TRIG	Input the measurement trigger
	SEQ TRIG IN	Input the trigger for sequence
	MEM1 RECALL	Recall preset memory 1
	MEM2 RECALL	Recall preset memory 2
External circuit power supply range		12 V to 24 Vdc ($\pm 10\%$)

Specifications


External digital output

Item	Common to all models
Output points	6 points (Polarity switchable)
Output form	Semiconductor relay output
	Do not use terminals
OFF	
OUTPUT ON	Outputting the signal while the output is ON
POWER ON	Signal is output when power supply is on and output is possible
H ALARM OUT	Output a signal when a HIGH alarm occurs
L ALARM OUT	Output a signal when a LOW alarm occurs
CC STATUS	Output a signal when operating in the CC mode
CV STATUS	Output a signal when operating in the CV mode
SEQ TRIG OUT	Output the trigger for sequence
SEQ STATUS	Signal is output while the sequence is running
EXT DIN BUSY	Output a signal when the digital input is in BUSY status
MEM1 ACT TIME	Signal is output when the setting is completed for preset memory 1
MEM2 ACT TIME	Signal is output when the setting is completed for preset memory 2
RELAY DRIVE	Output a signal after approx. 100 ms in step with on/off of the DC OUTPUT terminal output. You can set this parameter to only Ch.6.

Communication interface

Item	Common to all models
Common specifications	IEEE std. 488.2-1992
Software protocol	Complies with SCPI Specification 1999.0
Command language	
RS232C	<p>Hardware</p> <p>D-SUB 9-pin connector Baud rate: 1200, 2400, 4800, 9600, 19200, 38400, 57600, 115200 bps Data length: 8 bits, Stop bits: 1 bit, Parity bit: None Flow control: No, CTS-RTS</p>
	<p>Program message terminator</p> <p>LF during reception, LF during transmission</p>
USB (device)	<p>Hardware</p> <p>Standard type B socket Complies with the USB 2.0 specifications; data rate: 480 Mbps (high speed)</p>
	<p>Program message terminator</p> <p>LF or EOM during reception, LF + EOM during transmission</p>
	<p>Device class</p> <p>Complies with the USBTMC-USB488 device class specifications</p>
USB (host)	<p>Hardware</p> <p>Standard type A socket Complies with the USB 2.0 specifications; data rate: 480 Mbps (high speed)</p>
LAN	<p>Hardware</p> <p>IEEE 802.3 100BASE-TX or 10BASE-T Ethernet</p>
	<p>Communication protocol</p> <p>SCPI-RAW, SCPI-Telnet, HiSLIP, VXI-11</p>
	<p>Program message terminator</p> <p>SCPI-RAW: LF during reception, LF during transmission HiSLIP: LF or END during reception, LF + END during transmission.</p>
	<p>Compliant standards</p> <p>LXI Version 1.5 Specifications 2016</p>

Panel explanation

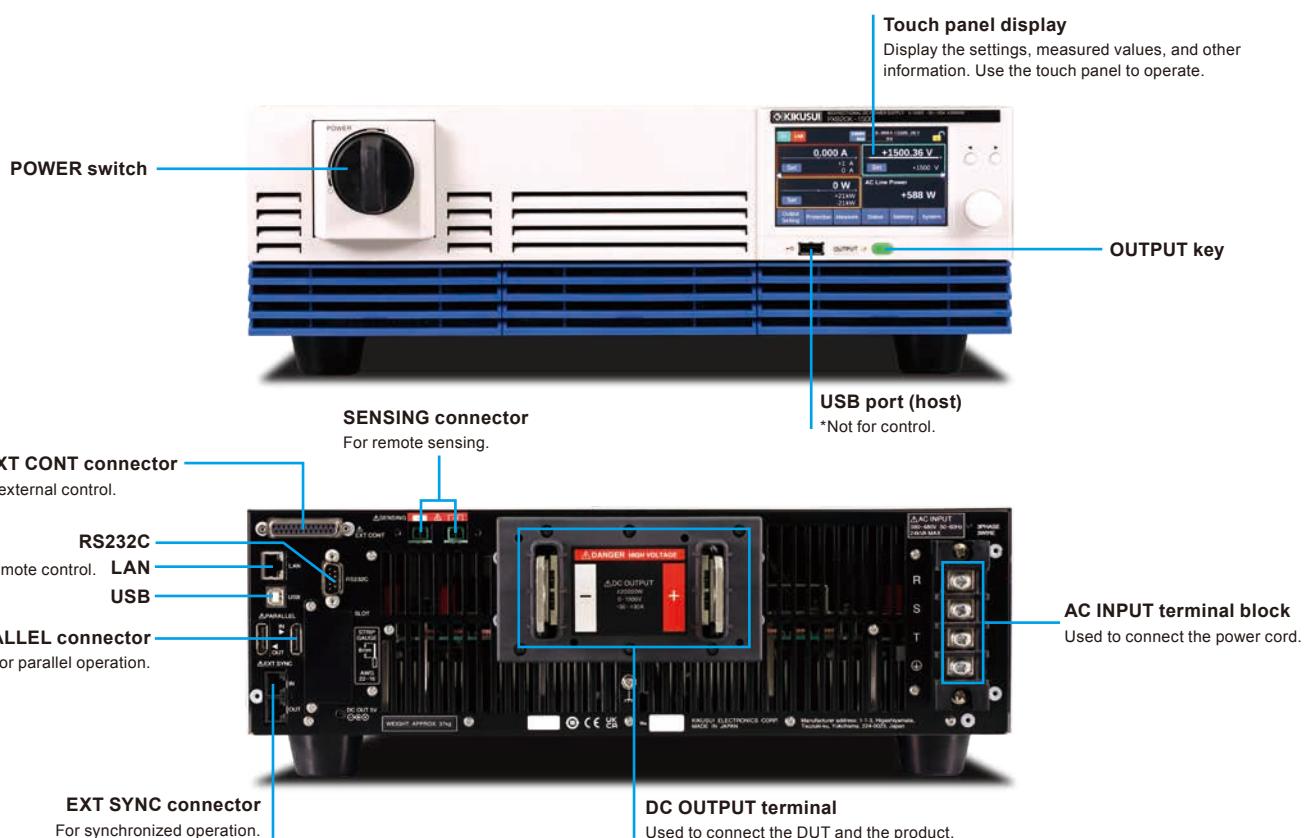

Specifications

Others

Item	Common to all models		
Synchronization function (clock synchronization)	Overview	SYNC icon is displayed on the display when synchronization is established with the internal clock after connecting with other PXB series using the EXT SYNC connector.	
	Sequence synchronization	Synchronization of the program start and step start.	
	Measurement synchronization	Synchronization of the measurement start	
	Output synchronization	Synchronization of output ON/OFF	
Sequence function	Operation mode	CV, CC, and CP modes	
	Maximum number of programs	30	
	Maximum number of steps	10 000	
	Step execution time	1 ms to 3 600 000 s	
	Loop count	1 to 100 000, or infinite	
Sine function	Operation mode	CV/CC mode	
	Frequency setting range *1	1 Hz to 1000 Hz	
	Frequency precision setting	1 Hz to 10 Hz	
		0.2 Hz	
		12 Hz to 100 Hz	
		2 Hz	
	CV	120 Hz to 1000 Hz	
		20 Hz	
	Maximum setting	Setting range up to 105 % of rated voltage	
	Maximum offset setting	Setting range up to 105 % of rated voltage	
Pulse function	CC	Maximum setting	Setting range up to 210 % of rated current
		Maximum offset setting	Setting range up to \pm 105 % of rated current
		Operation mode	CV/CC mode
		Frequency setting range *1	1 Hz to 1000 Hz
	Frequency precision setting	1 Hz to 10 Hz	0.01 Hz
		12 Hz to 100 Hz	0.1 Hz
		120 Hz to 1000 Hz	1 Hz
	CV	High level rated current	Setting range up to 105 % of rated voltage
		Low level rated current	Setting range up to 105 % of rated voltage
	CC	High level rated current	Setting range up to 105 % of rated current
		Low level rated current	Setting range up to 105 % of rated current
Measurement trigger	Duty cycle	2.5 % to 97.5 %	
	Measurement start condition (trigger source)	Conditions for starting measurement can be selected (when inputting from display, when inputting commands by remote control, when inputting signals by external control, and when operating in synchronization)	
	Number of measurements	1 to 65536	
	Measurement delay time	Setting range	
		0 s to 100 s	
	Measurement interval	Setting resolution	
		0.1 ms	
	Measurement time	Setting range	
		0.1 ms to 3600 s	
	I-V characteristic function	Setting resolution	
		0.1 ms	
Preset value Memory	Operation mode	CV/CC mode	
	Number of setup items	3 to 100 items (interpolated between points with straight lines)	
Setup Memory	Number of memory entries	20	
	Saved setting	Values in CV, CC, and CP modes, protection function values, and IR values	
Key Lock	Number of memory entries	21	
	Saved setting	On/off of the output from the DC OUTPUT terminal Output voltage value/Output current value/Output power value Output current for seamless operation (DC SEAM) Output mode Response Slew Rate Priority operation mode (Priority when output is ON) Impedance Setting When the Output is Off (Impedance when output is OFF) Value of the pulse function (Duty, Frequency, High, Low) Value of the sine function (Amplitude, Frequency, Offset) Number of I-V characteristics (Count) Internal resistance value (IR) Over voltage protection (OVP) Under voltage protection (UVP, UVP Enable) Over current protection (OCP(+), OCP(-), Delay) Over power protection (OPP(+), OPP(-)) Line overvoltage protection (Line OVP) Measurement trigger settings (Source, Count, Delay, Enable, Timer) Integration settings (Gate, Reset)	
		Output on/off and preset memory recall are available	
		Output on/off are available	
		Output off is available	
		Up to 25 units	

*1. Due to the PXB series output gain characteristics, the output is diminished when setting frequency to 100 Hz or more.

Specifications

General Specifications

Item	PXB20K-50	PXB20K-250	PXB20K-500	PXB20K-1000	PXB20K-1500							
Weight	Approx. 41 kg (90.39 lbs)	Approx. 39 kg (85.98 lbs)	Approx. 38 kg (83.78 lbs)	Approx. 37 kg (81.57 lbs)	Approx. 37 kg (81.57 lbs)							
Dimensions	430 (16.93)W×128 (5.04)H×720 (28.35)Dmm (inches) For details, refer to the dimensional drawing.											
Environmental conditions	Operating environment	Indoor use, Overvoltage category II										
	Operating temperature	0 °C to +40 °C (32 °F to +104 °F)	0 °C to +50 °C (32 °F to +122 °F)									
	Operating humidity	20 % rh to 85% rh (no condensation)										
	Storage temperature	-25°C to +60°C (-13 °F to +140 °F)										
	Storage humidity	90 % rh or less (no condensation)										
	Altitude	Up to 2000m										
Cooling system	Forced air cooling using fan											
Accessories	Input terminal cover, External control connector kit (1 set), Chassis connection wire, OUTPUT terminal cover, DC OUTPUT terminal screws (1 pair), EXT SYNC connector cover, SENSING connector cover, SENSING connector (2 pc.), Synchronized operation signal cable kit, Safety Information (1 copy), China RoHS sheet (1 sheet), Getting Started Guide (1 copy), Heavy object warning label (1 pc.)											
Withstand voltage	Between input and GND	2200 Vac for 1 minute										
	Between input and output	500 Vdc for 1 minute										
Insulation resistance	Between output and GND	1000 Vdc for 1 minute	1800 Vdc for 1 minute	1800 Vdc for 1 minute	3000 Vdc for 1 minute							
	Between input and GND	30 MΩ, 500 Vdc										
Isolation voltage	Between input and output	30 MΩ, 600 Vdc	30 MΩ, 1000 Vdc									
		±250 V	±600 V	±1000 V	±1000 V							
Electromagnetic compatibility (EMC) *1 *2		Complies with the requirements of the following directive and standards. EMC Directive 2014/30/EU EN 61326-1 (Class A *3)										
Safety *1		Complies with the requirements of the following directive and standards. Low Voltage Directive 2014/35/EU *2 EN 61010-1 (Class I *4, Overvoltage category II, Pollution Degree 2 *5) UL 61010-1 *6, CAN/CSA -C 22.2 NO.61010-1 *6										

*1. Does not apply to specially ordered or modified products.

*2. Only for models with CE marking / UKCA marking on their body.

*3. This is a Class A instrument. This product is intended for use in an industrial environment. This product may cause interference if used in residential areas. Such use must be avoided unless the user takes special measures to reduce electromagnetic emissions to prevent interference to the reception of radio and television broadcasts.

*4. This is a Class I instrument. Be sure to ground this product's protective conductor terminal. The safety of this product is guaranteed only when the product is properly grounded.


*5. Pollution is addition of foreign matter (solid, liquid or gaseous) that may produce a reduction of dielectric strength or surface resistivity. Pollution Degree 2 assumes that only non-conductive pollution will occur except for an occasional temporary conductivity caused by condensation.

*6. Only on models that have cTUVus marking on the panel.


Outline drawing are common to all models. *Maximum dimensions include protrusions and accessory covers.

Unit: mm (inches)

PXB20K-50

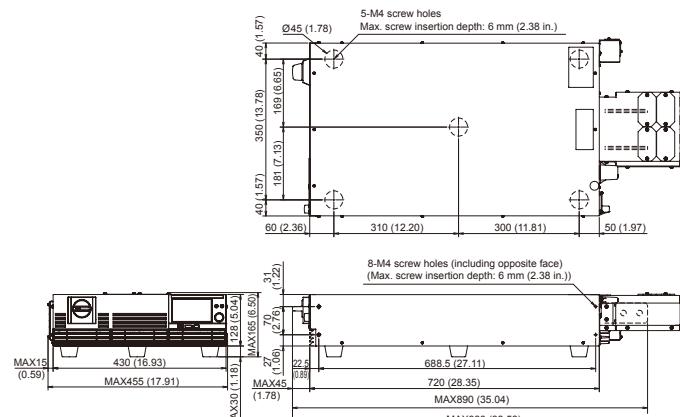

PXB20K-250
PXB20K-500
PXB20K-1000
PXB20K-1500

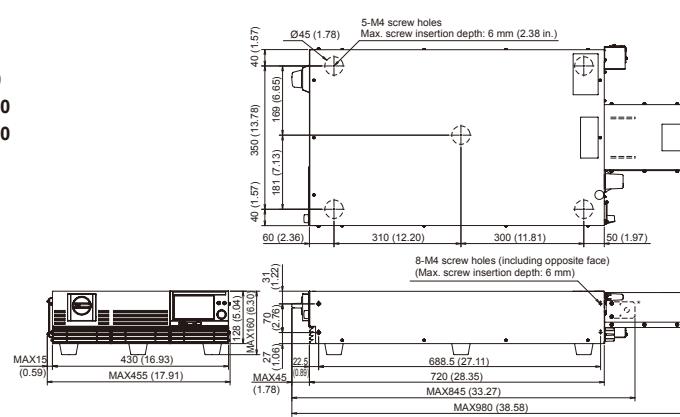

* The number of holes in bus bars varies depending on the model.

Ordering information

● Example of 100 kW system configuration (1500 V)

Product name	Model name	Volume
Bidirectional high-capacity DC power supply	PXB20K-1500	5
Parallel operation cable	PC01-PXB	4
Rack Mount Bracket	KRB3-TOS	5

● Example of 200 kW system configuration (1500 V)

Product name	Model name	Volume
Bidirectional high-capacity DC power supply	PXB20K-1500	10
Parallel operation cable	PC01-PXB	9
Rack Mount Bracket	KRB3-TOS	10

* Rack for mounting PXB main unit, power cables for 3-phase input, and load cables available separately.

* We can rack up the system and provide as a customer-specific solution. (Sold separately)

Options

● Parallel operation signal cable kit

PC01-PXB

● Rack mount bracket

KRB3-TOS (EIA inch rack standard)

KRB150-TOS (JIS millimeter rack standard)

● Load cable

Model name	Length	Maximum allowable current	Terminal size	Applicable models
DC200-4P3M-M12M12	3 m	800 A	M12/M12	PXB20K-50
DC80-2P3M-M10M10		200 A	M10/M10	PXB20K-250, PXB20K-500
HV22-2P3M-M12M8		80 A	M12/M8	PXB20K-1000, PXB20K-1500

● Three-phase input power cord

Model name	Length	Nominal cross-sectional area	Terminal size	Applicable models
AC22-4P3M-M6C-4S	3 m	22 mm ²	M6	All models



KIKUSUI ELECTRONICS CORPORATION

1-1-3, Higashiyamata, Tsuzuki-ku, Yokohama, Kanagawa, 224-0023, Japan
Phone: +(81)45-593-0200, Facsimile: +(81)45-593-7591, <https://global.kikusui.co.jp/>

KIKUSUI AMERICA, INC. 1-310-214-0000 | www.kikusuiamerica.com
 3625 Del Amo Blvd., Suite 160 Torrance, CA90503
Phone: 310-214-0000, Facsimile: 310-214-0014

KIKUSUI TRADING (SHANGHAI) Co., Ltd. | www.kikusui.cn
 Room 305, Shenggao Building, No.137, Xianxia Road, Shanghai City, China
Phone: 021-5887-9067, Facsimile: 021-5887-9069

KIKUSUI ELECTRONICS EUROPE GmbH
 Grossenbaumer Weg 8, 40472 Duesseldorf, Germany
Phone: +49(211)54257600, E-mail: info@kikusueurope.de

For our local sales distributors and representatives, please refer to "sales network" of our website.

● Distributor:

■ All products contained in this catalogue are equipment and devices that are premised on use under the supervision of qualified personnel, and are not designed or produced for home-use or use by general consumers. ■ Specifications, design and so forth are subject to change without prior notice to improve the quality. ■ Product names and prices are subject to change and production may be discontinued when necessary. ■ Product names, company names and brand names contained in this catalogue represent the respective registered trade name or trade mark. ■ Colors, textures and so forth of photographs shown in this catalogue may differ from actual products due to a limited fidelity in printing. ■ Although every effort has been made to provide the information as accurate as possible for this catalogue, certain details have unavoidably been omitted due to limitations in space. ■ If you find any misprints or errors in this catalogue, it would be appreciated if you would inform us. ■ Please contact our distributors to confirm specifications, price, accessories or anything that may be unclear when placing an order or concluding a purchasing agreement.