

30 MHz – 3000 MHz Hybrid Measurement Antenna

1 Introduction

The TBMA8 is an affordable hybrid measurement antenna, a combination of a biconical antenna with a logarithmic periodic antenna, covering a frequency range of 30 MHz up to 3 GHz, targeting radiated emission EMC pre-compliance testing.

The TBMA8 is characterized from 30 MHz to 3000 MHz and has VSWR and antenna factor values typical for hybrid measurement antennas.



2 Product overview


The TBMA8 is an average sized hybrid antenna, with its radiating elements and supporting booms made from aluminum alloy. It is equipped with a standard female N-connector and comes together with two triangular bowtie elements. The antenna provides a 20mm diameter mounting shaft (tube). An alternative, tiltable mounting element and tripods are available as optional accessories.

The TBMA8 is shipped in a robust carrying case.

3 Technical Specifications

Type	Hybrid antenna
Frequency range	30 MHz– 3000 MHz
VSWR	<2.1 (f > 80 MHz)
Isotropic gain at 3m spacing	-15 ... 8 dBi
Antenna factor at 3m spacing	8 ... 34 dB/m
Maximum continuous input RF power	130W
Nominal impedance	50 Ω
RF Connector	N type female
Mounting	22 mm diameter mounting shaft (tube)
Mechanical Dimensions	L x W x H: 1504 mm x 1183 mm x 558 mm (59.2" x 46.6" x 22")
Weight	6.7 kg (14.77 lbs)

30 MHz – 3000 MHz Hybrid Measurement Antenna

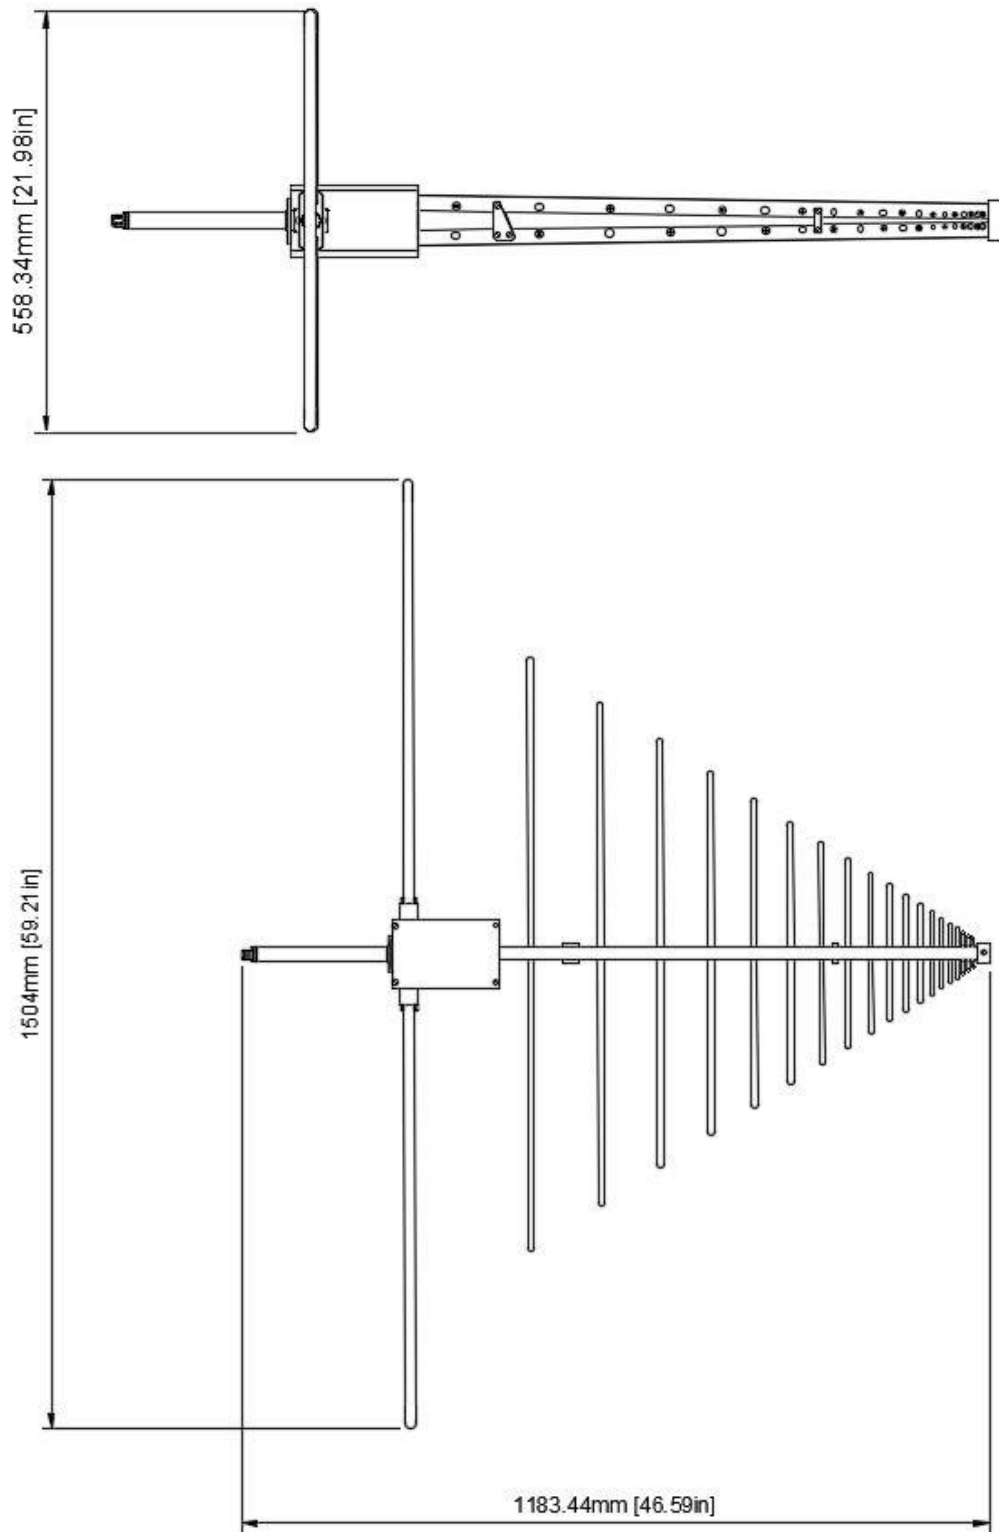

30 MHz – 3000 MHz Hybrid Measurement Antenna

4 TBMA8 Antenna Characterisation


4.1 Gain & Antenna Factor versus frequency

Frequency	Gain Isotropic (10m_Antenna Center)	Antenna Factor (10m_Antenna Center)	Gain Isotropic (3m_Antenna Center)	Antenna Factor (3m_Antenna Center)	Gain Isotropic (1m_Antenna Tip)	Antenna Factor (1m_Antenna Tip)
MHz	dBi	dB/m	dBi	dB/m	dBi	dB/m
30	-13.08	12.84	-14.82	14.58	-17.34	17.10
35	-12.11	13.21	-13.54	14.64	-17.04	18.14
40	-11.37	13.63	-12.63	14.89	-16.04	18.30
45	-10.58	13.86	-11.67	14.96	-14.88	18.17
50	-9.46	13.66	-10.48	14.68	-13.39	17.59
55	-8.21	13.24	-8.91	13.94	-12.28	17.31
60	-6.71	12.49	-7.05	12.84	-10.97	16.75
65	-4.72	11.20	-4.95	11.42	-9.29	15.77
70	-2.57	9.69	-2.78	9.90	-6.82	13.94
75	-0.16	7.88	-0.76	8.48	-4.23	11.95
80	1.57	6.71	0.58	7.70	-2.68	10.96
85	2.14	6.66	0.94	7.87	-2.29	11.10
90	1.87	7.43	0.62	8.68	-2.70	12.01
95	1.67	8.10	0.45	9.33	-3.24	13.02
100	1.78	8.44	0.95	9.27	-3.00	13.22
105	2.26	8.39	1.32	9.33	-2.21	12.85
110	2.57	8.48	1.68	9.37	-1.71	12.76
115	2.65	8.78	1.83	9.60	-1.28	12.72
120	2.37	9.43	1.88	9.93	-1.38	13.19
125	2.96	9.20	2.53	9.62	-0.99	13.14
130	3.42	9.07	2.98	9.52	-0.59	13.09
135	4.34	8.48	3.87	8.96	0.35	12.48
140	5.16	7.98	4.74	8.40	1.35	11.79
145	5.73	7.72	5.39	8.05	2.08	11.37
150	6.06	7.68	5.76	7.98	2.47	11.27
155	6.26	7.76	5.93	8.10	2.74	11.28
160	6.38	7.92	6.06	8.25	2.93	11.37
165	6.39	8.18	6.11	8.46	3.00	11.57
170	6.23	8.60	6.06	8.77	2.86	11.97
175	5.83	9.25	5.79	9.30	2.59	12.49
180	6.05	9.28	6.19	9.13	3.09	12.23
185	6.38	9.19	6.39	9.17	3.42	12.14
190	6.37	9.42	6.21	9.58	3.33	12.46
200	6.25	9.99	6.06	10.18	3.24	13.01
210	5.86	10.80	5.95	10.71	3.04	13.62
220	5.79	11.28	5.88	11.19	2.83	14.24
230	5.76	11.70	5.75	11.71	3.00	14.46
240	5.16	12.66	5.53	12.29	2.93	14.90
250	5.61	12.57	5.95	12.23	3.33	14.85
260	6.05	12.47	6.41	12.11	3.67	14.85
270	6.23	12.62	6.46	12.39	3.82	15.03
280	6.34	12.82	6.65	12.51	3.99	15.17
290	6.38	13.09	6.73	12.74	4.10	15.37
300	6.48	13.28	6.78	12.98	4.13	15.63
325	6.24	14.22	6.66	13.80	4.07	16.39
350	6.26	14.84	6.63	14.47	4.21	16.89
375	5.94	15.76	6.50	15.20	4.10	17.60
400	5.81	16.45	6.66	15.61	4.24	18.02
425	5.77	17.02	6.58	16.20	4.29	18.49
450	5.54	17.74	6.54	16.75	4.34	18.95
475	5.75	18.00	6.53	17.23	4.35	19.40


30 MHz – 3000 MHz Hybrid Measurement Antenna

500	5.69	18.51	6.59	17.61	4.47	19.73
550	5.26	19.76	6.49	18.53	4.52	20.50
600	5.59	20.19	6.78	19.01	4.79	20.99
650	5.68	20.79	6.79	19.69	4.71	21.76
700	5.84	21.28	6.84	20.28	5.08	22.04
750	6.63	21.09	7.69	20.04	5.63	22.09
800	5.81	22.47	6.72	21.56	5.02	23.26
850	6.36	22.44	7.44	21.37	5.56	23.24
900	5.93	23.37	7.27	22.04	5.41	23.90
950	5.87	23.90	7.07	22.70	5.25	24.53
1000	6.27	23.95	7.53	22.69	5.67	24.55
1050	7.79	22.86	7.91	22.74	6.04	24.60
1100	8.28	22.77	7.56	23.49	5.74	25.31
1150	7.57	23.86	7.23	24.20	5.53	25.90
1200	8.17	23.63	7.79	24.02	6.04	25.76
1300	7.75	24.74	7.76	24.74	6.00	26.50
1400	7.93	25.21	7.77	25.37	5.96	27.18
1500	8.35	25.39	8.00	25.74	6.17	27.57
1600	7.92	26.39	7.79	26.51	6.23	28.07
1700	8.50	26.33	7.99	26.84	6.31	28.52
1800	7.90	27.43	7.33	28.00	5.52	29.81
1900	7.74	28.05	7.43	28.37	5.74	30.05
2000	8.29	27.95	8.36	27.88	6.54	29.70
2100	7.95	28.72	7.55	29.12	5.59	31.07
2200	7.67	29.40	6.60	30.46	4.88	32.19
2300	7.84	29.61	6.93	30.53	5.43	32.03
2400	8.13	29.70	8.15	29.67	6.10	31.73
2500	7.19	30.99	6.95	31.23	6.28	31.90
2600	6.79	31.73	7.33	31.19	5.28	33.24
2700	6.57	32.28	6.32	32.52	5.17	33.68
2800	7.05	32.11	6.28	32.88	4.49	34.68
2900	6.52	32.95	5.59	33.87	3.77	35.70
3000	6.46	33.30	5.67	34.09	4.09	35.67

30 MHz – 3000 MHz Hybrid Measurement Antenna

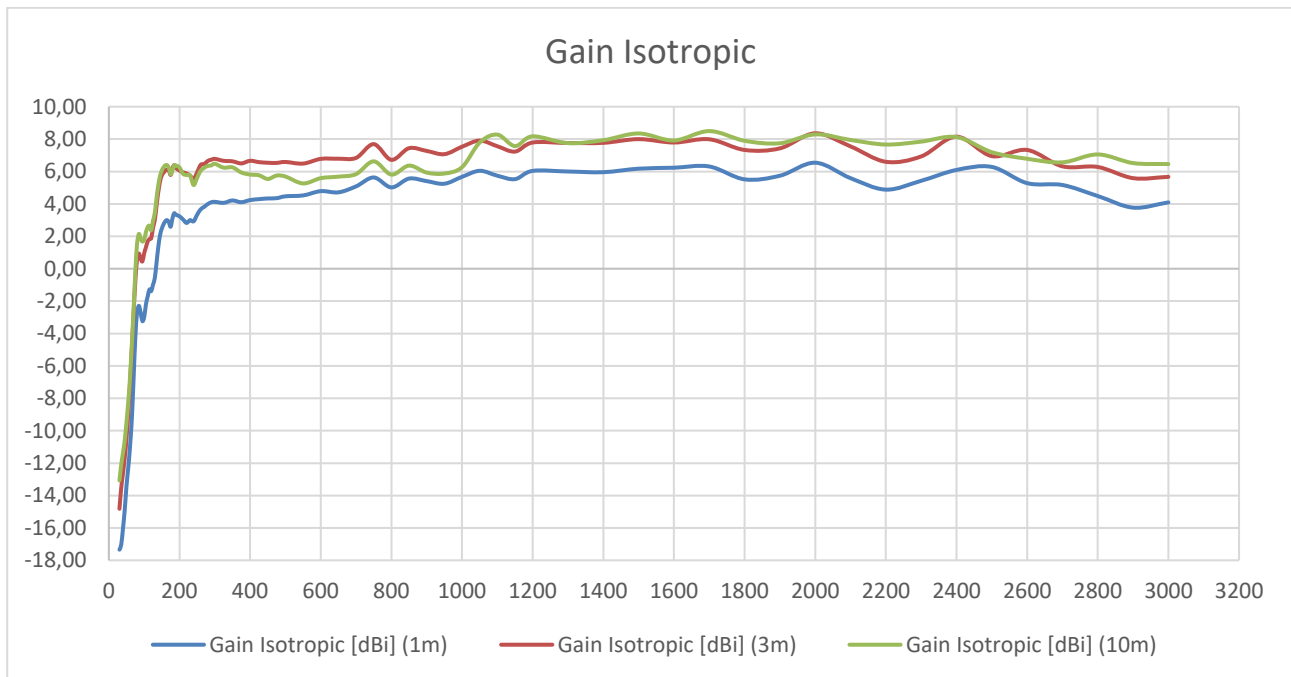


30 MHz ... 3000 MHz, Isotropic Gain of TBMA8

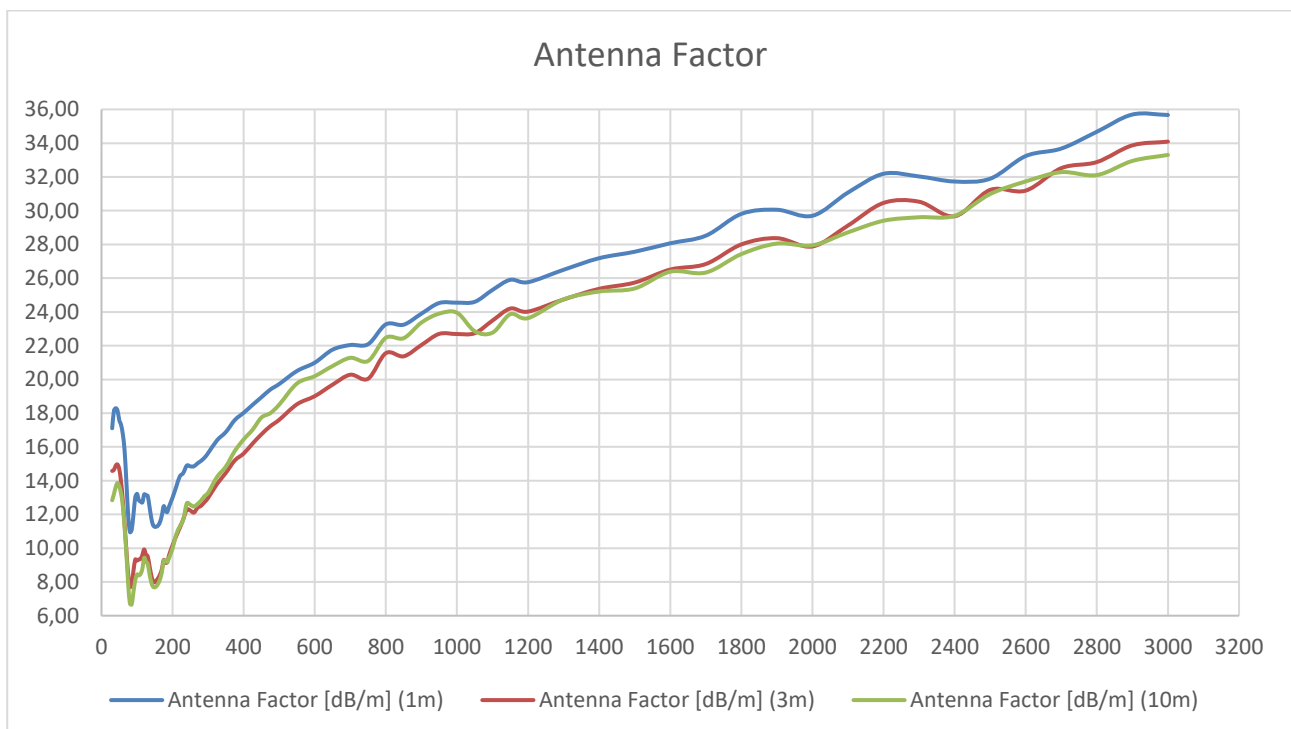


30 MHz ... 3000 MHz, Antenna Factor of TBMA8

30 MHz – 3000 MHz Hybrid Measurement Antenna

3.1 TBMA8 Return Loss / VSWR

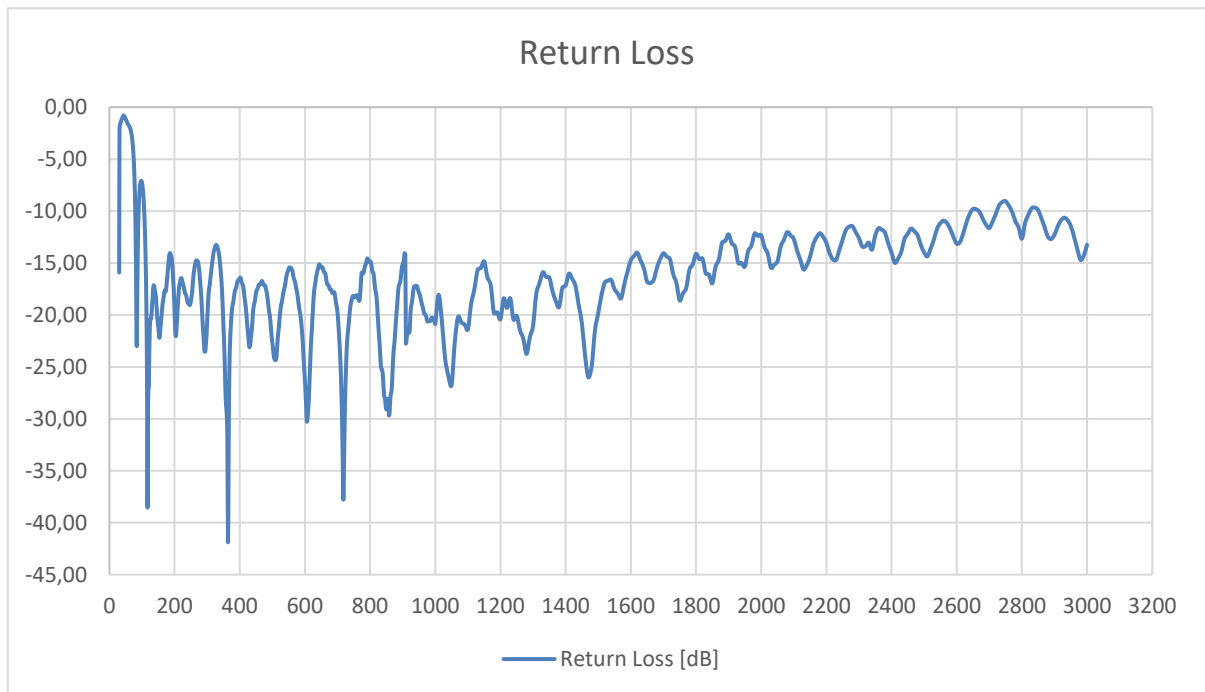

TBMA8, S11, 30 MHz ... 3000 MHz

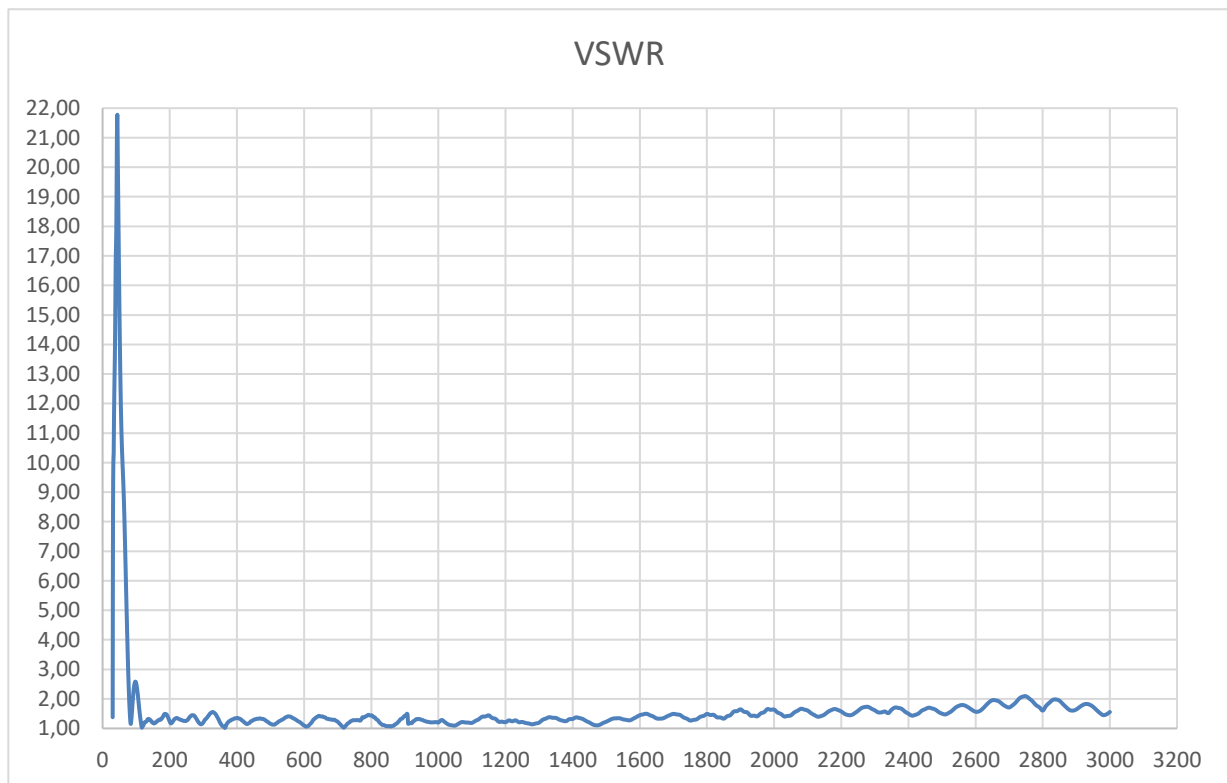

TBMA8, VSWR, 30 MHz ... 3000 MHz

Detailed test reports from Seibersdorf Laboratories can be downloaded from our website

30 MHz – 3000 MHz Hybrid Measurement Antenna

4 Optional Tripods and mounting brackets



Recommended tripods: TBTP4 or TBTP5



*TBMA8 on TBTP4; using TBMA8-PAT mounting bracket;
) at 1m height, only suitable for horizontal orientation



TBMA8 on TBTP5; using TBMA8-PAT mounting bracket; recommended tripod

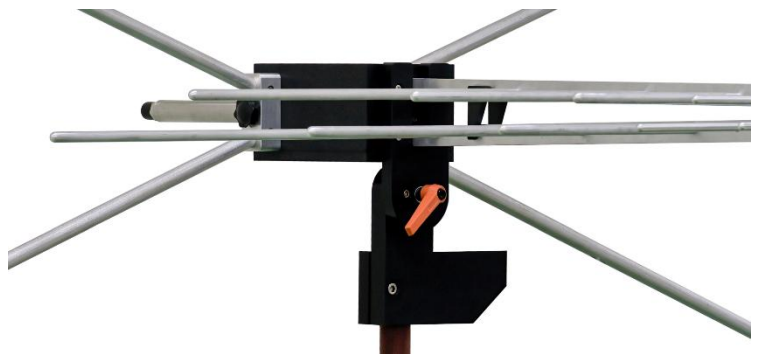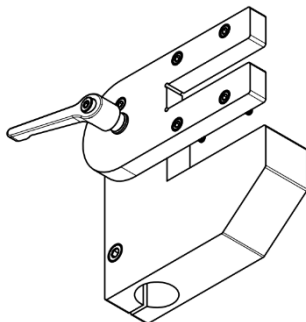

Optional TBMA8-PA mounting bracket; only recommended for setups with limited space

30 MHz – 3000 MHz Hybrid Measurement Antenna

5 Ordering Information

Part Number	Description
TBMA8	30 – 3000 MHz hybrid measurement antenna , carrying case

Accessories

Part Number	Description
TBTP4	Wooden tripod
TBTP5	Fiberglass tripod, *) recommended tripod for TBMA8
TBMA8-PA	Tiltable mounting bracket for TBMA8 and TBMA7; for 22 mm antenna shafts, clamps sideways to 30 mm tripod shafts; *) recommended adapter for TBMA8
TBMA8-PAT	Tiltable mounting bracket for TBMA8; attached to the antenna balun and mounted on top of a 30mm tripod shaft

6 History

Version	Date	Author	Changes
V1.0	11.14.2024	Mayerhofer	Creation of the document
V1.1	18.6.2025	Mayerhofer	Updated tripod information
V1.2	23.12.2025	Mayerhofer	Updated tripod and adapter information