



PLZ-5W / 5WZ SERIES



DC ELECTRONIC LOAD

Multifunctional Electronic Load PLZ-5W/5WZ Series

Operation Voltage : 0.25 V to 150 V

High Speed Slew Rate : 60 A/μs

Arbitrary I-V Characteristics: "ARB Mode" included

Parallel Operation Feature: Total current and power can be increased to a maximum of 10.8 kW (2160 A) with booster units.

High resolution color LCD display

Various Communication Interfaces : LAN (LXI compliant), USB, RS232C, GPIB (Option), External Analog Control

Improved Sequence Feature (Maximum 10000 steps)

Impedance Measurement Function

The New Flagship model is born!

Introducing the new standard of Electronic Load !

High-speed response, universal interface, large-scale system compatibility

The PLZ-5W series electronic load is the successor of the highly respected PLZ-4W that continues the series tradition of high specification and excellent build quality.

New improvements include a user-friendly LCD color display and a wide voltage range from 0.25 V to 150 V.

Custom voltage/current profiles can now be programmed using the new ARB function, ideal for LED driver and solar panel testing. The PLZ-5W now includes 6 basic modes of operation (CC, CR, CV, CP, CC+CV, & CR+CV) for optimal flexibility in any test facility.

The PLZ-5W is now equipped with a high-speed response feature boasting a maximum slew rate of 60 A/us (PLZ1205W) and a minimum setting resolution of 10 uA (PLZ205W).

Additional features include a soft-start function, variable slew rate, selectable response mode (CV/CR mode), switching function, ABC programmable memory, 20 user-defined setup configurations, and a sequence function. The high-speed response of the PLZ-5W is ideal for the development and testing of modern day power supplies that require sudden changes in current at high speeds as well as for testing of current clamps and transducers. The PLZ-5W series is available in 4 standard models which can be incrementally expanded by adding booster units (PLZ2405W) for a maximum of 10.8 kW/2160 A. The PLZ-5W now is equipped with a diverse digital communication interface supporting LAN (LXI), USB, RS232C, analog control, and GPIB as a factory option.



Detachable input terminals for ease of use.



Actual
size

D C E L E C T R O N I C L O A D

Multifunctional Electronic Load **PLZ-5W Series**

Model	Operating voltage	Current	Power
PLZ205W	0.25 V to 150 V	40 A	200 W
PLZ405W		80 A	400 W
PLZ1205W		240 A	1200 W
PLZ2405WB		480 A	2400 W



[functions]

- Parallel operation
- Communication function
- Current monitor output
- Variable slew rate
- Switching function
- Soft start function
- Elapsed time display
- and auto load off timer
- Remote sensing function
- Load on/off operations
- Range control input
- Trigger input
- Alarm input
- Alarm status output
- Load-on status signal output
- Range status output
- Short-circuit function
- External voltage control input(CC, CR, CV and CP modes)
- Overvoltage protection (OVP)
- Overcurrent protection (OCP)
- Overpower protection (OPP)
- Overheat protection (OTP)
- Undervoltage protection (UVP)
- Reverse connection detection (REV)

Color liquid crystal display (LCD)

Highly resolution color display allows for the convenient monitoring of values such as voltage, current, power, current capacity (Ah) and power capacity (Wh) all in the same place.



Wide-ranging digital interface

LAN (LXI) / USB / RS232C as standard interface *GPIB Option



Use a browser from a PC, smartphone, or tablet to access the web server built into the PLZ-5W series for convenient control and monitoring.

[Recommended browser]
 • Internet Explorer version 9.0 or later
 • Firefox 8.0 or later
 • Safari/Mobile Safari 5.1 or later
 • Chrome 15.0 or later
 • Opera 11.0 or later

*Connecting with a smartphone, tablet, etc. requires a Wi-Fi environment (wireless LAN router etc.).

LXI compliant!!
 control and monitor the power
 from built-in browser!

New numeric keypad for easy operation

Values can now be input directly from the front panel.

Industry's highest slew rate of 540 A/μs

Achieves a rated current (*2160 A) rise time of 4 μs.

Supports high-speed transient response testing, which is becoming increasingly significant for power supply evaluation.

*PLZ1205W + PLZ2405WB × 4 units

The slew rate increases proportionally to the number of units operating in parallel. Maximum slew rate of 60 A/μs can be set for the single PLZ1205W (rated current: 240 A).




Measurement conditions:

equipment: PLZ1205W + PLZ2405WB × 4 units, capacitor load, load terminal voltage: 50 V, load current settings: 300 A/600 A/900 A/1200 A

High speed voltage tracking characteristics


High speed voltage tracking in CR mode is perfect for applications such as power supply startup tests.

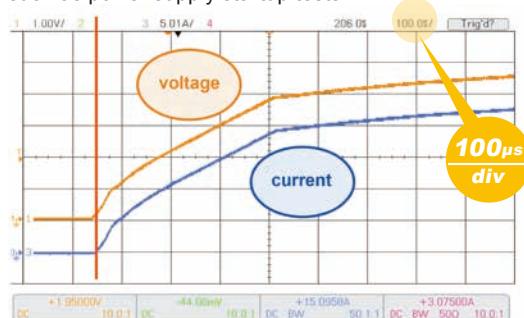

Application software

Sequence Creation Software SD023-PLZ-5W

SD023-PLZ-5W (Wavy for PLZ-5W) is the proprietary Kikusui software for sequence creation and control of Kikusui power supplies and electronic loads. "Wavy" software allows for easy sequence creation and editing without prior programming knowledge. Wavy software can be used for remote control of the electronic load, monitoring of voltage and current values, and for data logging.

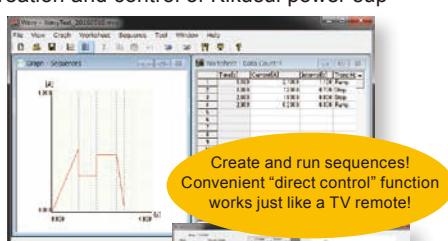

Sequence creation / execution screen



Direct control screen

[See P15]

*For details, please see our company's homepage.

Operation modes

The following five operation modes are available on the PLZ-5W. These can be selected when the load is in the off state.


Constant current (CC) mode	A current value is specified and the current is kept constant even when the voltage changes.
Constant resistance (CR) mode	A conductance value is specified and the PLZ-5W sinks current proportional to the voltage variation.
Constant voltage (CV) mode	A voltage is specified and the PLZ-5W sinks current so that the voltage at the load input end of the PLZ-5W is constant.
Constant power (CP) mode	A voltage is specified and the PLZ-5W sinks current so that the power consumed inside the electronic load is constant.
Arbitrary I-V characteristics (ARB) mode	The desired load characteristics can be set by specifying multiple arbitrary voltage values and current values as I-V characteristics.

Adjustable slew rate

The speed of change can be set when the current is changed. The slew rate setting will function in the following instances.

- When the setting is changed to vary the current value (including the switching function).
- When the current value is changed using external control in constant current (CC) mode.
- When the current value is changed while the load is on.

CC Mode / High range / 0-80A Switching

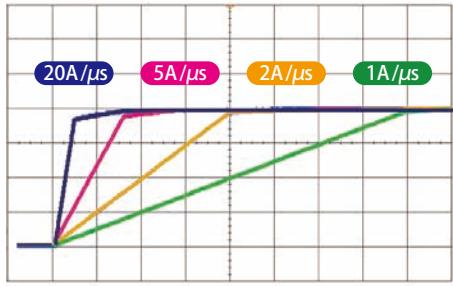

▲Shift in the current waveform with the change in the slew rate

The slew rate is set according to the current range as an amount of current change per unit of time. Moreover, a common value is set for the rise and fall speeds. In CC mode and ARB mode, the slew rate can be set regardless of whether the load is on or off.

High precision and high resolution

The built-in three-range configuration provides wide dynamic range and high precision.

PLZ205W operating range and setting resolution

		Operating range	Setting resolution
Constant current mode	H range	0 A to 40 A	1 mA
	M range	0 A to 4 A	0.1 mA
	L range	0 A to 0.4 A	0.01 mA
Constant resistance mode*	H range	40 S to 0.002 S	1 mS
	M range	4 S to 0.0002 S	0.1 mS
	L range	400 mS to 0.02 mS	0.01 mS
Constant voltage mode	H range	0.25 V to 150 V	5 mV
	L range	0.25 V to 15 V	0.5 mV
Constant power mode	H range	20 W to 200 W	0.005 W
	M range	2 W to 20 W	0.0005 W
	L range	0.2 W to 2 W	0.00005 W

* Conductance [S] = Input current [A] / Input voltage [V] = 1 / Resistance [Ω]


Load on/off operation

The following load on/off settings are available in addition to standard operations that can be carefully adjusted to fit the needs of any test environment.

- Start with "load on" when power is turned on
- Display elapsed "load on" time
- Auto "load off" when time limit is reached
- Control "load on/off" with external controls such as relays

Arbitrary I-V characteristics (ARB) mode


In ARB mode arbitrary I-V characteristics can be set by entering multiple I-V points (voltage and current value set points). 3 to 100 points can be registered and the spaces between all points are automatically linearly interpolated. This mode can be used for the simulation of LED drivers and other DUT's with non-linear characteristics.[P8]

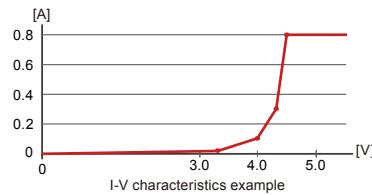

Example of settings	
Voltage [V]	Current [A]
0	0
3.2	0.02
4.0	0.1
4.3	0.3
4.5	0.8
157.5	0.8


Short function

When the short function is activated, the maximum current value will be set if in CC mode, and the minimum voltage value will be set if in CR mode. The relay contact (30 Vdc/1 A) of the EXT CONT connector closes, and the load input terminals can then be shorted by driving an external high-current relay.

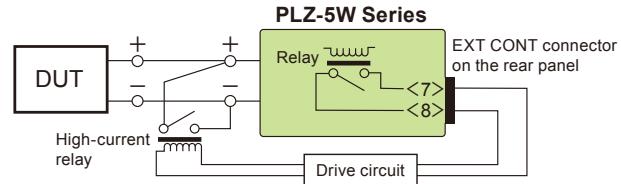

Switching function

Switching mode can be performed at up to kHz while in CC and CR modes. The switching setting parameters such as switching level, frequency, and duty factor can be changed at any time, even while the load is on.

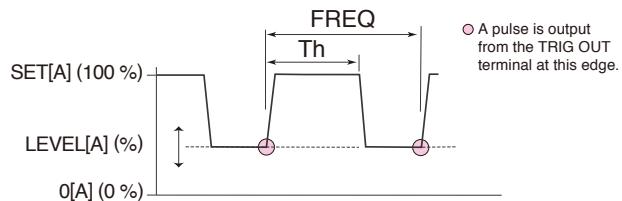

[Setting parameters]

- Operation mode: CC and CR
- Frequency setting range: 1 Hz to 100 kHz
- Frequency setting resolution

1 Hz to 10 Hz	0.1 Hz
11 Hz to 100 Hz	1 Hz
110 Hz to 1 kHz	10 Hz
1.1 kHz to 10 kHz	0.1 kHz
10 kHz to 100 kHz	20 kHz, 50 kHz, 100 kHz

- Frequency setting accuracy: $\pm(0.5\% \text{ of set})$

Duty factor, steps

1 Hz to 10 Hz	
11 Hz to 100 Hz	5.0% to 95.0%, in steps of 0.1%
110 Hz to 1000 Hz	
1.1 kHz to 10.0 kHz	5.0% to 95.0%, in steps of 1%
10 kHz to 100 kHz	10% to 90%, in steps of 10%


* The minimum time interval for setting the duty factor is 5 μs.

Soft start function

The soft start feature controls the rise time of the load current. The soft start feature can be activated when the following conditions are met.

- The rise time of the soft start has been set.
- "Load on" while in CC Mode.
- Soft start input settings start from zero input and end equal to or above the minimum operating conditions.


This function can be used if the output of the DUT becomes unstable when the load current rises sharply, or when the operator wishes to delay the current change on startup to prevent the DUT's overcurrent protection circuit from being activated.

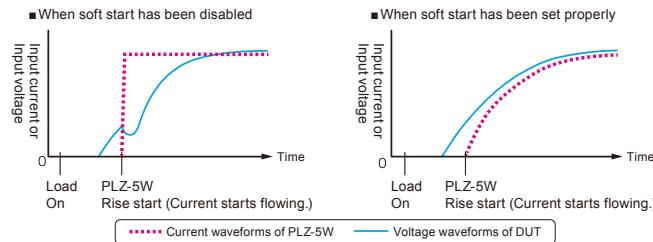

Can be set to OFF / 100 μ s / 200 μ s / 500 μ s / 1 ms / 2 ms / 5 ms / 10 ms / 20 ms. This sets the soft start time.

Sequence function


The operator can execute a long sequence of predetermined values with the sequence function. A sequence consists of programs and steps. A program is a collection of steps, which are executed in order, one by one, starting from step 1. The program is considered complete after the last step in the program is executed.

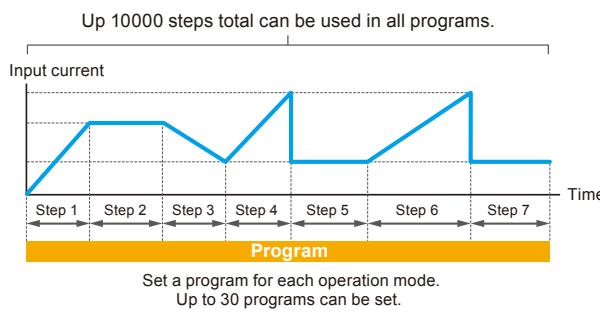

Setting item	Description
Load setting	Current, conductance, voltage, power. The values that can be set depend on the current operation mode.
Step execution time	0.000025s to 3600000s
Transition method of the current value	Step or Ramp
Number of loops of program	1 to 1000000 repetitions, or infinite repetitions.
Sequence editing / execution / stop method	Front panel operation or remote operation via RS232C / LAN / USB.
Miscellaneous	Load on/off control, Slew Rate, CV mode addition, Trigger signal setting, trigger signal output. Specifies the value at which a protection function (OCP, OPP, UVP) is activated.

●TALink

The operator can use the TALink (Transient Acquire Link) trigger to synchronize the PLZ-5W with steps of a sequence and enable data logging. Logged data can then be accessed via digital communication with the PLZ-5W.

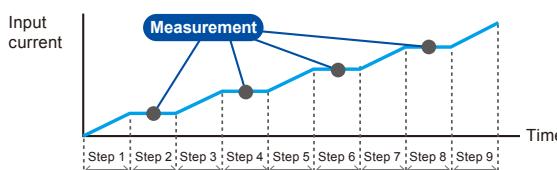


Remote sensing function

With remote sensing, the voltage measurement point can be changed from the load input terminal to the DUT sensing point. By connecting the sensing leads to the DUT, the effects of voltage drops caused by resistance in the load cables can be reduced and the load current stabilized. To activate remote sensing, connect the sensing cables to the sensing terminals of the PLZ-5W at the DUT end, and enable the remote sensing function.

- Possible remote sensing compensation voltage : approx. 7 V (Total potential difference between the input terminals and sensing terminals)

Auto load off timer

The auto load off timer automatically turns off the load after a specific amount of time elapses from the discharge of the DUT. The integrated power and current is measured immediately after the load is turned off, ideal for battery discharge tests.

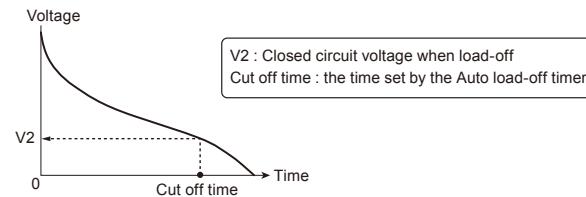

Synchronized operation

The following synchronization features are available when simply connecting the PLZ-5W with other equipment using a communication cable.

- Synchronizing load on/off among multiple pieces of equipment
- Synchronizing measurements (remote control)
- Synchronizing the start time and resume time for sequences across multiple units

Different PLZ-5W models can be connected (Ex: PLZ205W and PLZ1205W). Synchronization is also available during parallel operation.

Setup memory

The setup memory can store up to 20 sets of the settings listed below.

- Operation mode
- Load settings (current, conductance, voltage, power)
- Current range setting
- Voltage range setting
- Slew rate
- Switching level (current value/conductance value, or percentage)
- Switching interval (frequency/time of one cycle and duty cycle/ operating time on the high side.)
- Alarm detection point
- Content of ABC preset memories

ABC preset memory

Three setting values can be stored in preset memory slots A, B, and C. The stored values can be recalled freely at any time even when the load is on. In CC+CV and CR+CV modes, constant current and constant voltage values, as well as constant resistance and constant voltage values can be recalled and saved, respectively.

Diverse protections, other functions

Overcurrent protection (OCP), Overpower protection (OPP), Overvoltage detection(OVP), Undervoltage protection (UVP), Overheat detection(OTP), Reverse-connection detection(REV), Alarm input detection, Configuration setting, USB Keyboard Compliant

Booster (PLZ2405WB)

*PLZ2405WB is a dedicated booster for PLZ1205W. It cannot be used with any other model.

Achieving 2400 W in a "2U" chassis

Connecting up to 4 booster (PLZ2405WB) units with the master (PLZ1205W) increases the maximum system capability to 10.8 kW 2160 A. The optional parallel cable (PC01-PLZ-5W) is required to connect between the master and slave/booster units.

- Increased power with optional booster units
(Maximum currents and maximum voltages)

Slave unit	1 unit	2 units	3 units	4 units
PLZ2405WB	720 A 3600 W	1200 A 6000 W	1680 A 8400 W	2160 A 10800 W



Booster unit PLZ2405WB

[Configuration example]



▲ 3.6 kW system combined with the PLZ1205W (upper unit) and PLZ2405WB (lower unit).

- Comparison with the existing system when connecting 4 booster units.

Comparison with the PLZ4W SR Series

existing product



9 kW

PLZ9004W SR
PLZ1004W+PLZ2004WB×4sets

Volume Ratio
Less than
Approx.
35%

&
Power
Density
Approx.
1.8
times



10.8 kW

PLZ10005W SR
PLZ1205W+PLZ2405WB×4sets

- Large-capacity systems of 10.8 kW or more, rack-mounted systems, and other types of systems are supported.
For more information, please contact our sales representatives.

External dimensions (max): 430(440)W×86(105)H×450(505)Dmm
Weight: Approx. 15 kg (33.07 lb)

Parallel operation

Multiple units of the same type can be connected in parallel.

Even without boosters, up to five PLZ-5W units of the same model can be connected in parallel for a maximum of 6 kW, 1200 A. While connected in parallel, one master has complete control of the slave unit(s), allowing the user to control the entire system and monitor all data from the master unit's panel. Parallel operation requires one optional parallel cable (PC01-PLZ-5W) per unit.

*The PLZ2405WB (Booster) comes with 1 pc. of parallel operation cable (PC01-PLZ-5W).


- Number of parallel connected units and capacities
(maximum currents and maximum voltages)

Slave unit	1 unit	2 units	3 units	4 units
PLZ205W	80 A 400 W	120 A 600 W	160 A 800 W	200 A 1000 W
PLZ405W	160 A 800 W	240 A 1200 W	320 A 1600 W	400 A 2000 W
PLZ1205W	480 A 2400 W	720 A 3600 W	960 A 4800 W	1200 A 6000 W

*Additional parallel operation calibration can achieve the same setting and measurement accuracy of a single unit.


● Connection example

Parallel operation using
boosters (PLZ1205W only)

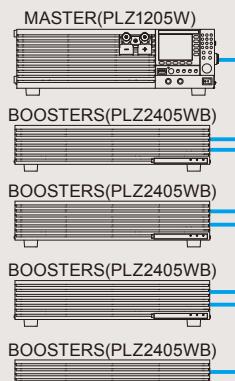

Parallel operation
signal cable
(PC01-PLZ-5W)

Parallel operation
using the same type of
electronic loads

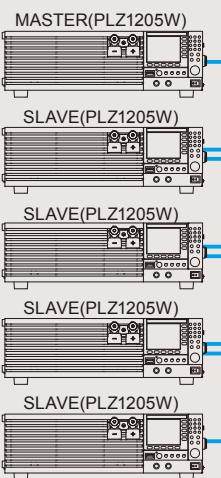

Impedance measurement function (factory option)

The perfect addition for battery production and maintenance


- The all-new PLZ-5WZ series allows for easily configured impedance measurements with dedicated impedance measurement software.
- Impedance measurements are made during discharge, allowing for real-time measurement of impedance values from the DUT.
- Capable of R, jX, θ, and Z measurements.
- Measures AC frequency from 100 Hz - 10 kHz (seven fixed settings) and signal levels can be set arbitrarily.
- Equipped with a voltage slope correction function that minimizes the effect of voltage slope during battery discharge tests.
- Zero adjustment function allows for increased accuracy during critical impedance measurements.
- Measurement results and graphical information can be copied directly from the application software to programs like Excel.

Lineup

Model
PLZ205WZ (SPEC21192)
PLZ405WZ (SPEC21192)
PLZ1205WZ (SPEC21192)


*High-capacity models are also available via special order.

System configuration (example)

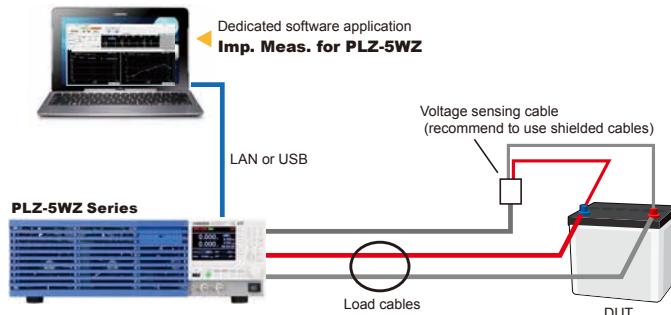

Impedance measurement system PLZ-5WZ Series (SPEC21192)


Application software Imp. Meas. for PLZ-5WZ (accessory)

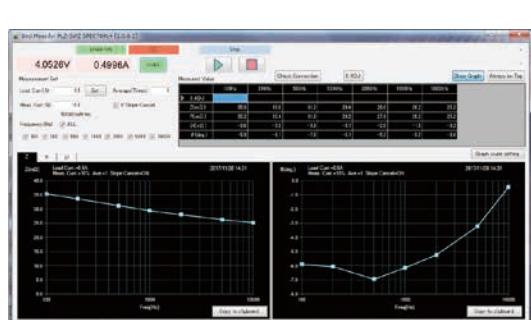


Measurement functions

Item	Details	Conditions & remarks
Measurement AC frequency	100 Hz, 200 Hz, 500 Hz, 1 kHz, 2 kHz, 5 kHz, 10 kHz	Seven fixed settings
Measurement AC current (Meas Curr.)	0.1 % to 10 % of the DC load current (load curr.)	Set as a percentage
Measurement time	50 ms to 5 s	Depends on the measurement AC frequency.
Measurement items	R, X, Z , θ	θ is calculated from R and X.
Measurement average	Averages 1 to 16 measured values.	Function available when using application
Zero adjustment (0 ADJ)	Zero adjustment on the DUT voltage sensing end	Function available when using application
V Slope Cancel	Eliminates the effect that the slope of the DUT voltage caused by discharge has on measurements	Complete elimination is not possible if the slope is nonlinear
Measurement method	2-phase lock-in amplifier method	Based on digital computation.
Operating environment	Windows7/Windows10 (32 bit/64 bit)	

Measurement condition diagram

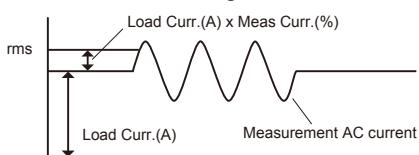

Impedance measurement for each single cell is also possible



Measurement accuracy

[Conditions] ■ Ambient temperature: 18°C to 28°C ■ DUT: Reference resistance ■ Bias power supply: 12 V 54 Ah lead battery
■ Measurement AC current: Depends on DUT impedance (refer to the following table).

Voltage range at L range (15 V)

Percentage of ±Z readout value		Measurement AC frequency		
DUT impedance	Measurement AC current	100 Hz, 200 Hz, 500 Hz	1 kHz, 2 kHz	5 kHz, 10 kHz
1.0 mΩ to 9.9 mΩ	500 mArms or more	±(5% of reading+0.5 mΩ)	±(5% of reading+0.5 mΩ)	—
10.0 mΩ to 99.9 mΩ	250 mArms or more	±(5% of reading+0.5 mΩ)	±(5% of reading+0.5 mΩ)	—
100.0 mΩ to 1000.0 mΩ	150 mArms or more	±(2% of reading+0.5 mΩ)	±(3% of reading+0.5 mΩ)	—

Voltage range at H range (150 V)


Percentage of ±Z readout value		Measurement AC frequency		
DUT impedance	Measurement AC current	100 Hz, 200 Hz, 500 Hz	1 kHz, 2 kHz	5 kHz, 10 kHz
1.0 mΩ to 9.9 mΩ	2 Arms or more	±(5% of reading+0.5 mΩ)	±(5% of reading+0.5 mΩ)	—
10.0 mΩ to 99.9 mΩ	500 mArms or more	±(5% of reading+0.5 mΩ)	±(5% of reading+0.5 mΩ)	—
100.0 mΩ to 1000.0 mΩ	250 mArms or more	±(3% of reading+0.5 mΩ)	±(4% of reading+0.5 mΩ)	—

*Accuracy of measurements outside the measurement range, L range current, and shaded portion is not guaranteed.

*θ is calculated from R and X by the application software. *Specifications not listed above are in accordance with PLZ-5W series product specifications.

Current sensor evaluation (example)

Accurate current sensor evaluation possible when combined with a high-precision CC DC power supply. Additionally, 3-level range settings allow you to.

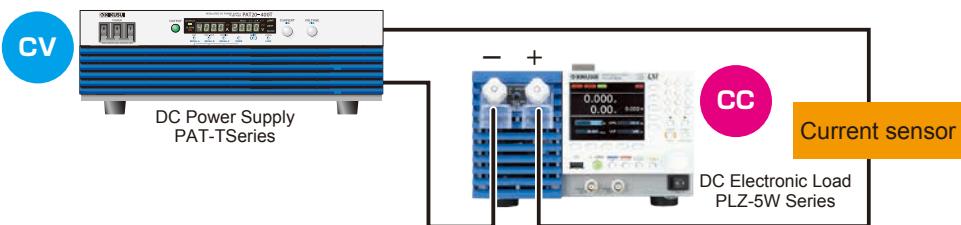


LED load simulation (example)

● Arbitrary I-V characteristics (ARB) mode

In ARB mode arbitrary I-V characteristics can be set by entering multiple I-V points (voltage and current value set points). 3 to 100 points can be registered and the spaces between all points are automatically linearly interpolated. This mode can be used for the simulation of LED drivers and other DUT's with non-linear characteristics.

■ Lighting LED lamp.....24 V, 48 V, 150 V


■ Lazer Diode.....4 V, 35 V, 60 V

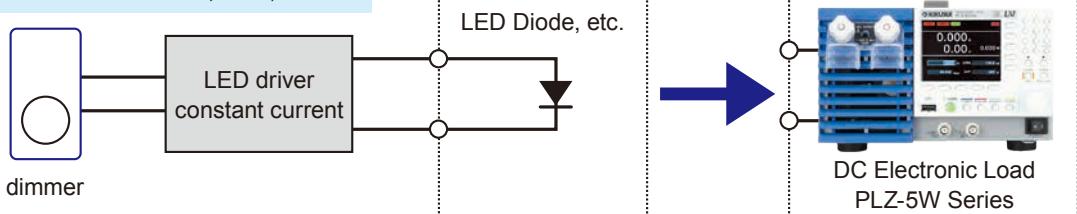

Impedance measurement of the power supply (example)


"When using the PLZ-5W"

Measure power supply impedance by configuring a system using the PLZ-5W, a function generator, and a digital multimeter.

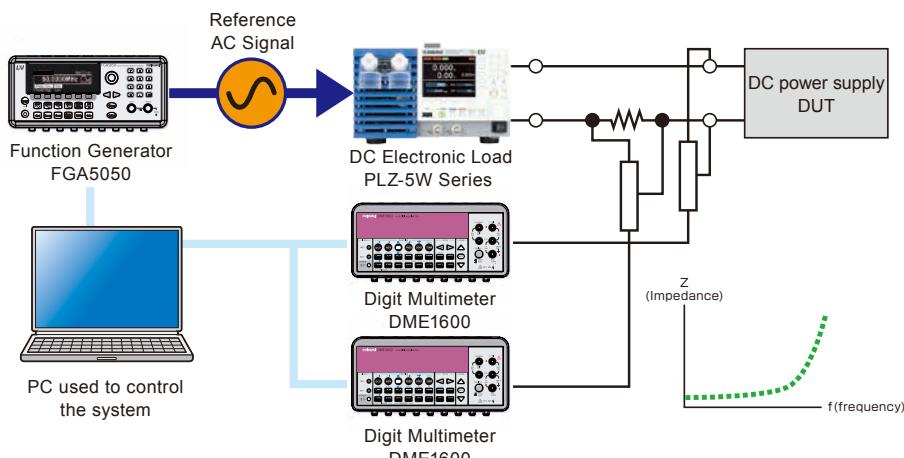


"When using the PLZ-5WZ"

A function generator is not necessary.

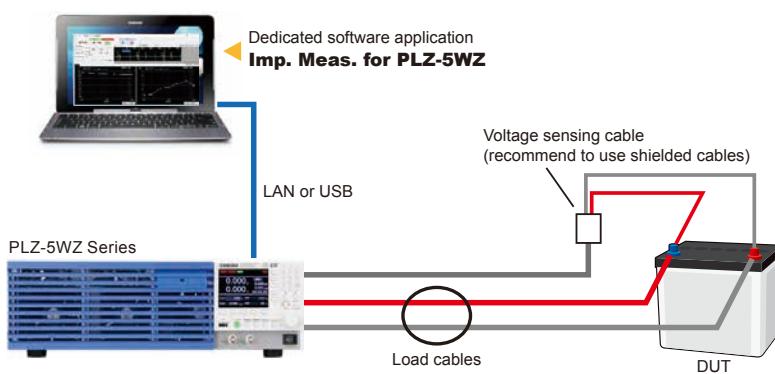


Fuse rupture test (example)

For fuse rupture tests, DC power supplies with high-speed CC current control is absolutely vital. Although it is normally quite difficult to achieve such high-speed control with only a DC power supply, the addition of a PLZ-5W electronic load makes high speed current control possible. With the PLZ-5W, fuse rupture tests that adhere to standards such as the JASO D612 are made possible. These tests include voltage drop tests, transient current cut-off tests, rupture time tests, step energization tests, and breaking capacity tests.

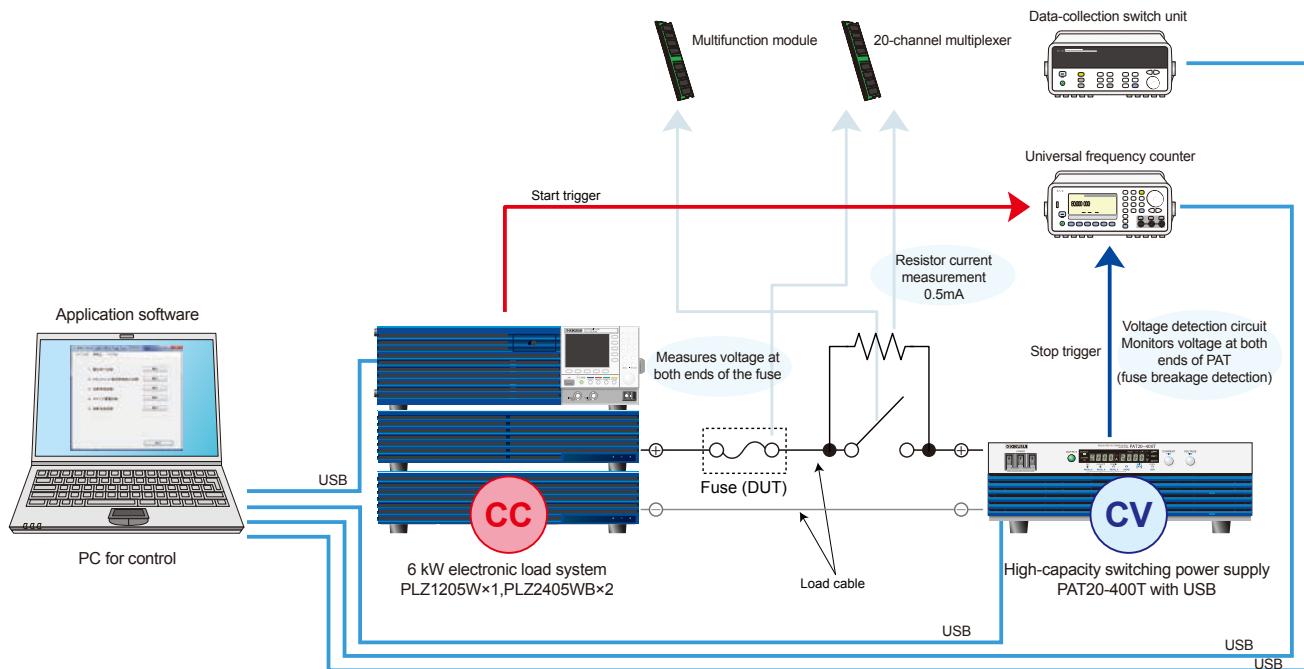

Battery evaluation test (example)

Although high-speed operation cannot be achieved using only the PAT-T high-capacity switching power supply, the fast-response unipolar power supply system can be supplemented by connecting with the PLZ-5W series electronic load in series and parallel. This makes it possible to flow current while synchronizing the charge and discharge current patterns for a battery at high speeds. Furthermore, the additional features of the PLZ-5WZ allow for seamless measurement of battery impedance during evaluation.

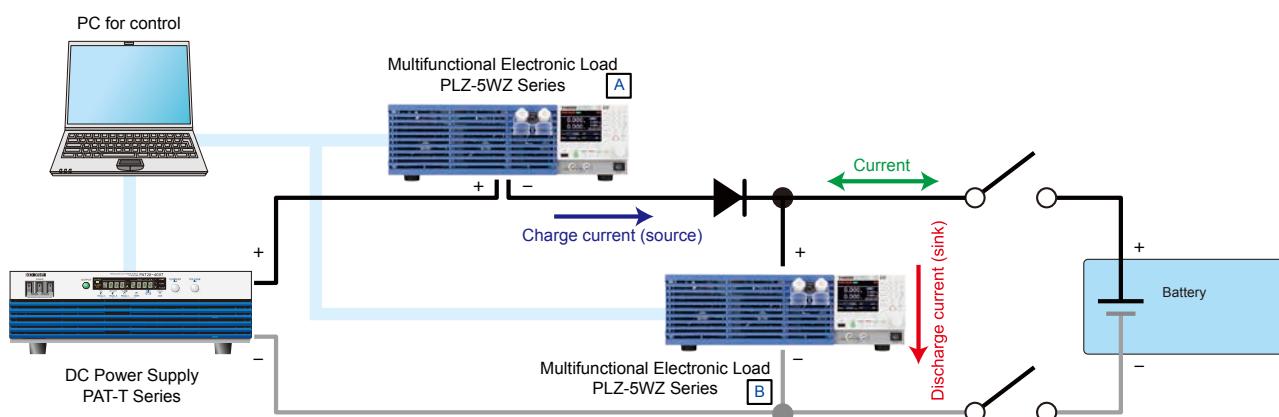

PLZ-5W SR (Smart Rack) Series

The compact, large scale PLZ-5W SR (Smart Rack) system is available for high power applications that don't take up valuable test space.

- The system comes in 4 models ranging from 6 kW to 20.4 kW.
- Assembled with exclusive components for optimal design.
- Systems are delivered fully assembled and tested, ready to operate immediately.
- AC input 90 V to 250 V auto select; no special wiring is required.
- Range switching function guarantees the exact specification down to the smallest input.
(Performance test data is included)
- LAN/USB/RS232C as standard interface. *GPIB option
- Compatible with "Wavy" Sequence Creation Software.
- Load input terminal is designed for optimal safety.
- Load cable for high current is available.

High Current
Max. 2160 A
6kW to 20.4 kW



PLZ6005W SR

6 kW



PLZ10005W SR

10.8 kW



PLZ15005W SR

15.6 kW



PLZ20005W SR

20.4 kW



Terminal Cover

Safety covers supplied on all models.

User-friendly terminal cover design for maximum safety and ease of access


Applications (example)

- Charge/Discharge test on the large capacity secondary battery
- Converter evaluation
- Alternator evaluation
- FC stack cell evaluation
- PV panel evaluation
- EV charger evaluation
- Heat generation evaluation by the harness electric conduction
- Capacitor endurance test
- Evaluation on the industrial large capacity DC power supply system

- The Smart Rack is safe, easy-to-use, and expertly designed.



Input terminals capable of handling large currents



■ PLZ-5W SR Series

Specifications		Rating			Constant current mode (CC)				Constant voltage mode (CV)			
Model	Operating voltage V	Current A	Power W	Operating range			Ripple mArms*	Operating range		Resolution		
				H range (A)	M range (A)	L range (A)		H range (V)	L range (V)	H range (mV)	L range (mV)	
PLZ6005W SR	1 to 150	1200	6000	0 to 1260	0 to 126	0 to 12.6	120	0 to 157.50	0 to 15.750	5	0.5	
		2160	10800	0 to 2268	0 to 226.8	0 to 22.68	216					
		2160	15600	0 to 3276	0 to 327.6	0 to 32.76	312					
		20400	20400	0 to 4284	0 to 428.4	0 to 42.84	408					
Specifications		Constant resistance mode (CR)			Constant power mode (CP)				Weight	Power consumption		
Model		Operating range			Operating range				Approx.	Approx.		
		H range (S)	M range (S)	L range (S)	H range (W)	M range (W)	L range (W)		kg	VA		
PLZ6005W SR		1260 to 0	126 to 0	12.6 to 0	0 to 6300	0 to 630	0 to 63.0		82	275		
PLZ10005W SR		2268 to 0	226.8 to 0	22.68 to 0	0 to 11340	0 to 1134	0 to 113.4		120	465		
PLZ15005W SR		3276 to 0	327.6 to 0	32.76 to 0	0 to 16380	0 to 1638	0 to 163.8		160	655		
PLZ20005W SR		4284 to 0	428.4 to 0	42.84 to 0	0 to 21420	0 to 2142	0 to 214.2		200	855		

* Measurement frequency bandwidth: 10 Hz to 1 MHz At measurement current of 100 A

■ High Current Load Wire (Solderless terminals on both ends.)


Model	DC14-2P3M-M12M8	DC38-2P3M-M12M8	DC80-2P3M-M12M8	DC80-2P3M-M12M12	DC150-2P3M-M12M12	DC150-4P3M-M12M12	DC600-2P3M-M12M12
Maximum Allowable voltage	650 V						150 V
Maximum Allowable current	50 A	100 A	200 A	200 A	300 A	500 A	1000 A
Terminal	M12 / M8	M12 / M8	M12 / M8	M12 / M12	M12 / M12	M12 / M12	M12 / M12
Nominal Cross-Sectional Area (Equivalent of AWG5)	14 mm ²	38 mm ²	80 mm ²	80 mm ²	150 mm ²	150 mm ²	600 mm ²
Length / Weight *Per cable	Approx. 3 m / Approx. 0.5 kg	Approx. 3 m / Approx. 1.4 kg	Approx. 3 m / Approx. 2.8 kg	Approx. 3 m / Approx. 2.8 kg	Approx. 3 m / Approx. 5 kg	Approx. 3 m / Approx. 5 kg	Approx. 3 m / Approx. 20 kg
Exterior design							

Outline drawing


■ Outline drawing

PLZ6005W SR	432.6(17.03)W×385.6(15.18)H×640 (25.20)Dmm(inches)	PLZ15005W SR	432.6(17.03)W×748.4(29.46)H×640(25.20)Dmm(inches)
PLZ10005W SR	432.6(17.03)W×567(22.32)H×640 (25.20)Dmm(inches)	PLZ20005W SR	432.6(17.03)W×929.8(36.61)H×640(25.20)Dmm(inches)


●PLZ6005W SR

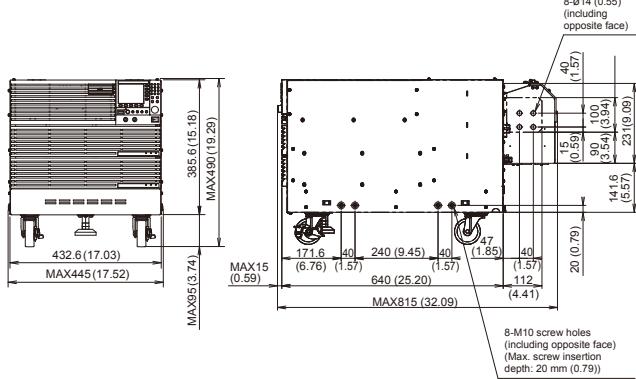


●PLZ10005W SR

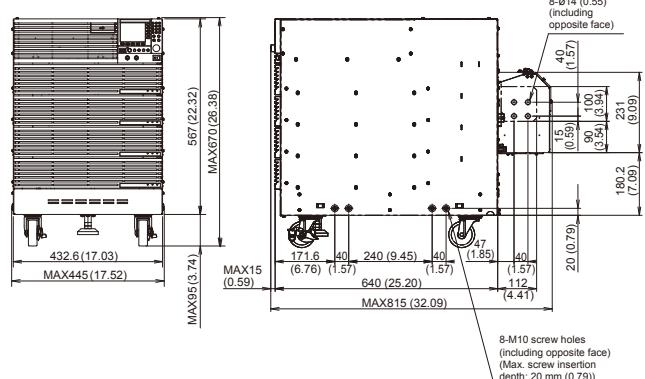

●PLZ15005W SR

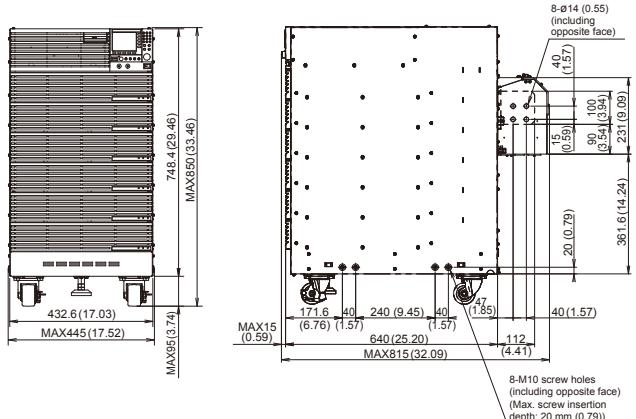

●PLZ20005W SR

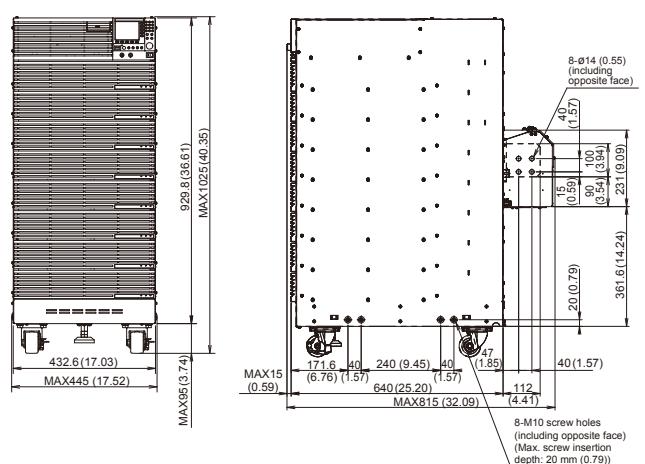

■ PLZ205W/PLZ405W/PLZ1205W Specifications

Ratings			
Item	PLZ205W	PLZ405W	PLZ1205W
Operating voltage (DC)	0.25 V to 150 V *1		
Current *2	40 A	80 A	240 A *3
Power	200 W	400 W	1200 W
The minimum operating voltage	approximately 0.05 V. (At the load input terminals on the rear panel.)		
Input resistance when the load is off	Approx. 660 kΩ *4		
Load input terminal's isolation voltage	±500 V		

*1 In switching mode, for every slew rate setting of 1 A/μs, the minimum operating voltage (including the voltage drop due to the wiring inductance component) increases by approx. 150 mV for the PLZ205W, approx. 125 mV for the PLZ405W, and approx. 75 mV for the PLZ1205W.
 *2 If the input voltage is 1 V or less, the current is reduced by 10% per 0.1 V.
 *3 80 A for the load input terminals on the front panel.
 The specifications of the PLZ-5W are for the load input terminals on the rear panel and the load input terminals on the front panel may not meet the specifications.
 *4 In the case of parallel operation using the same models, approx. 660/number of units kΩ.

Constant current (CC) mode			
Item	PLZ205W	PLZ405W	PLZ1205W
Operating range	H range 0 A to 40 A	0 A to 80 A	0 A to 240 A
	M range 0 A to 4 A	0 A to 8 A	0 A to 24 A
	L range 0 A to 0.4 A	0 A to 0.8 A	0 A to 2.4 A
Setting range	H range 0 A to 42 A	0 A to 84 A	0 A to 252 A
	M range 0 A to 4.2 A	0 A to 8.4 A	0 A to 25.2 A
	L range 0 A to 0.42 A	0 A to 0.84 A	0 A to 2.52 A
Resolution	H range 1 mA	2 mA	5 mA
	M range 0.1 mA	0.2 mA	0.5 mA
	L range 0.01 mA	0.02 mA	0.05 mA
Setting accuracy	H range ± (0.2% of set + 0.1% of range)		
	M range ± (0.2% of set + 0.3% of range)		
	L range ± (0.2% of set + 1% of range)		
Parallel operation	H range ± (0.4% of set + 0.8% of range)		
	M range ± (0.4% of set + 0.8% of range)		
	L range ± (0.4% of set + 5% of range)		
Input line regulation *1	4 mA	8 mA	24 mA
Ripple	rms *2 4 mA	8 mA	24 mA
	p-p *3 40 mA	80 mA	200 mA

*1 When the input voltage is changed from 1 V to 150 V at a current of rated power / 150 V.

*2 Measurement frequency bandwidth: 10 Hz to 1 MHz

*3 Measurement frequency bandwidth: 10 Hz to 20 MHz

Constant resistance (CR) mode			
Item	PLZ205W	PLZ405W	PLZ1205W
Operating range *1	H range 40 S to 0.002 S (0.025 Ω to 500 Ω)	80 S to 0.004 S (0.0125 Ω to 250 Ω)	240 S to 0.012 S (0.042 Ω to 83.333 Ω)
	M range 4 S to 0.0002 S (0.25 Ω to 5000 Ω)	8 S to 0.0004 S (0.125 Ω to 2500 Ω)	24 S to 0.0012 S (0.042 Ω to 833.33 Ω)
	L range 400 mS to 0.02 mS (2.5 Ω to 50000 Ω)	800 mS to 0.04 mS (1.25 Ω to 25000 Ω)	2400 mS to 0.12 mS (0.42 Ω to 8333.3 Ω)
Setting range	H range 42 S to 0 S (0.0238 Ω to Open)	84 S to 0 S (0.0119 Ω to Open)	252 S to 0 S (0.00397 Ω to Open)
	M range 4.2 S to 0 S (0.238 Ω to Open)	8.4 S to 0 S (0.119 Ω to Open)	25.2 S to 0 S (0.0397 Ω to Open)
	L range 420 mS to 0 S (2.38 Ω to Open)	840 mS to 0 S (1.19 Ω to Open)	2520 mS to 0 S (0.397 Ω to Open)
Resolution	H range 1 mS	2 mS	5 mS
	M range 0.1 mS	0.2 mS	0.5 mS
	L range 0.01 mS	0.02 mS	0.05 mS
Setting accuracy	H range ± (0.5% of set + 0.5% of range)		
	M range ± (0.5% of set + 0.5% of range)		
	L range ± (0.5% of set + 1.5% of range)		
Parallel operation	H range ± (0.5% of set + 1.5% of range)		
	M range ± (0.5% of set + 1.5% of range)		
	L range ± (0.5% of set + 5% of range)		

*1 Conductance [S] = input current [A]/input voltage [V] = 1 / resistance [Ω]

*2 Converted value at the input current. At the sensing terminals during remote sensing.

Constant voltage (CV) mode			
Item	PLZ205W	PLZ405W	PLZ1205W
Operating range	H range 0.25 V to 150 V		
	L range 0.25 V to 15 V		
Setting range	H range 0 V to 157.5 V		
	L range 0 V to 15.75 V		
Resolution	H range 5 mV		
	L range 0.5 mV		
Setting accuracy	± (0.1% of set + 0.1% of range)		
*1	Parallel operation ± (0.2% of set + 0.2% of range)		
Input current variation *2	12 mV		

*1 With the input voltage within the operating range, and at the sensing terminals during remote sensing.

*2 For a current change in the range of 10% to 100% of the rating at an input voltage of 5 V (during remote sensing).

Constant power (CP) mode			
Item	PLZ205W	PLZ405W	PLZ1205W
Operating range	H range 20 W to 200 W	40 W to 400 W	120 W to 1200 W
	M range 2 W to 20 W	4 W to 40 W	12 W to 120 W
	L range 0.2 W to 2 W	0.4 W to 4 W	1.2 W to 12 W
Setting range	H range 0 W to 210 W	0 W to 420 W	0 W to 1260 W
	M range 0 W to 21 W	0 W to 42 W	0 W to 126 W
	L range 0 W to 2.1 W	0 W to 4.2 W	0 W to 12.6 W
Resolution	H range 0.005 W	0.01 W	0.05 W
	M range 0.0005 W	0.001 W	0.005 W
	L range 0.00005 W	0.0001 W	0.0005 W
Setting accuracy	H range ± (0.5% of range + 0.04 A × Vin)	± (0.5% of range + 0.08 A × Vin)	± (0.5% of range + 0.24 A × Vin)
	M range ± (0.5% of range + 0.008 A × Vin)	± (0.5% of range + 0.016 A × Vin)	± (0.5% of range + 0.048 A × Vin)
	L range ± (1% of range + 0.004 A × Vin)	± (1% of range + 0.008 A × Vin)	± (1% of range + 0.024 A × Vin)
Parallel operation	H range ± (2% of range + 0.4% current range × Vin)	± (2% of range + 0.4% current range × Vin)	± (2% of range + 2.5% current range × Vin)
	M range ± (2% of range + 0.4% current range × Vin)	± (2% of range + 0.4% current range × Vin)	± (2% of range + 2.5% current range × Vin)
	L range ± (2% of range + 2.5% current range × Vin)	± (2% of range + 2.5% current range × Vin)	± (2% of range + 2.5% current range × Vin)

*1 Vin: Rear panel load input terminal voltage or sensing terminal voltage.

Arbitrary I-V characteristics (ARB) mode			
Item	PLZ205W	PLZ405W	PLZ1205W
Operating range	Three to 100 points of current values can be set for the input voltage. The space between two points is linearly interpolated.		
Response speed	Response for input voltage minimum 50 μs.		
Voltmeter			
Item	PLZ205W	PLZ405W	PLZ1205W
Display	H range 0.00 V to 150.00 V		
	L range 0.000 V to 15.000 V		
Accuracy	± (0.1% of reading + 0.1% of range)		
	Parallel operation (TYP) ± (0.1% of reading + 0.1% of range)		
Ammeter			
Item	PLZ205W	PLZ405W	PLZ1205W
Display	H range 0.000 A to 40.000 A	0.000 A to 80.000 A	0.00 A to 240.00 A
	M range 0.0000 A to 4.0000 A	0.0000 A to 8.0000 A	0.000 A to 24.000 A
	L range 0.000 mA to 400.00 mA	0.00 mA to 800.00 mA	0.0000 A to 2.4000 A
Accuracy	H, M range ± (0.2% of reading + 0.3% of range)		
	L range ± (0.2% of reading + 1% of range)		
	H, M range ± (0.4% of reading + 0.8% of range)		
Power display			
Item	PLZ205W	PLZ405W	PLZ1205W
Display	Displays the product of the voltmeter reading and ammeter reading.		
Switching function			
Item	PLZ205W	PLZ405W	PLZ1205W
Operation mode	CC and CR		
Frequency setting range	1.0 Hz to 100.0 kHz		
Frequency setting resolution	1 Hz to 10 Hz	0.1 Hz
	11 Hz to 100 Hz	1 Hz
	110 Hz to 1000 Hz	10 Hz
Frequency setting accuracy	1.1 kHz to 10.0 kHz	0.1 kHz
	10 kHz to 100 kHz	20 kHz, 50 kHz, 100 kHz
	± (0.5% of set)		
Duty cycle setting range, step	1 Hz to 10 Hz	5.0% to 95.0%, 0.1% steps
	11 Hz to 100 Hz	5.0% to 95.0%, 0.1% steps
	110 Hz to 1000 Hz	5.0% to 95.0%, 0.1% steps
*1	1.1 kHz to 10.0 kHz	5% to 95%, 1% steps
	10 kHz to 100 kHz	10% to 90%, 10% steps

*1 The minimum time span is 5 us. The minimum duty cycle is limited by the minimum time span.

Slew rate			
Item	PLZ205W	PLZ405W	PLZ1205W
Operation mode			CC
Setting range	H range 0.01 A/μs to 10 A/μs	0.02 A/μs to 20 A/μs	0.06 A/μs to 60 A/μs
	M range 0.001 A/μs to 1 A/μs	0.002 A/μs to 2 A/μs	0.006 A/μs to 6 A/μs
	L range 0.1 mA/μs to 100 mA/μs	0.2 mA/μs to 200 mA/μs	0.6 mA/μs to 600 mA/μs
Resolution	H range 0.01 A/μs	0.02 A/μs	0.06 A/μs
	M range 0.001 A/μs	0.002 A/μs	0.006 A/μs
	L range 0.1 mA/μs	0.2 mA/μs	0.6 mA/μs
Setting accuracy	H, M range ± (10% of set + 1.25 μs)		
	L range ± (12% of set + 5 μs)		
*1 Time to change from 10% to 90% when the current is changed from 0% to 100% of the rated current			
Soft start			
Item	PLZ205W	PLZ405W	PLZ1205W
Operation mode	CC		
Time setting range	100 μs, 200 μs, 500 μs, 1 ms, 2 ms, 5 ms, 10 ms, 20 ms, or off		
Time setting accuracy	± (30% of set + 10 μs)		

■ PLZ205W/PLZ405W/PLZ1205W Specifications

Possible remote sensing compensation voltage				
Item	PLZ205W	PLZ405W	PLZ1205W	
Approx. 7 V (total potential difference between the input terminals and sensing terminals).				
Protective function				
Item	PLZ205W	PLZ405W	PLZ1205W	
Overcurrent protection (OCP)	Setting range Resolution Protection operation	0.0 A to 44.0 A 10 mA Either load off or limitation can be selected.	0.0 A to 88.0 A 10 mA 0.0 A to 264.0 A	0.0 A to 1320 W 0.1 W Either load off or limitation can be selected.
Overpower protection (OPP)	Setting range Resolution Protection operation	0 W to 220 W 0.1 W Either load off or limitation can be selected.	0 W to 440 W 0.1 W 0 W to 1320 W	0 W to 1320 W 0.1 W 0 W to 1320 W
Undervoltage protection (UVP)	Setting range Resolution Protection operation	0.00 V to 150.00 V, or off 0.01 V Load off	0.00 V to 150.00 V, or off 0.01 V Load off	0.00 V to 150.00 V, or off 0.01 V Load off
Watchdog protection(WDP)	Setting range Protection operation	1 s to 3600 s or off Load off	1 s to 3600 s or off Load off	1 s to 3600 s or off Load off

Sequence function			
Item	PLZ205W	PLZ405W	PLZ1205W
Operation mode	CC, CR, CV, CP		
Maximum number of programs	30		
Maximum number of steps	10000		
Step execution time	25 µs to 1000 h		
Time resolution	25 µs		
Other functions			
Item	PLZ205W	PLZ405W	PLZ1205W
Elapsed time display	Displays the time from load on to load off. Range	1s to 999h 59min 59s.	
Integrated current display	Displays the integrated current from load on to load off.		
Integrated power display	Displays the integrated power from load on to load off.		
Auto load off timer	Automatically turns off the load after the specified time elapses. Setting range	1s to 3599999s, or off.	

EXT CONT connector			
Item	PLZ205W	PLZ405W	PLZ1205W
Load on/off control input	Logic level switchable. Pulled up to 5 V by a 10 kΩ resistor. The thresholds are HIGH: 3.5 V to 5 V, LOW: 0 V to 1.5 V.		
Range control input	The range can be switched between L, M, and H using a 2 bit signal. Pulled up to 5 V by a 10 kΩ resistor. The thresholds are HIGH: 3.5 V to 5 V, LOW: 0 V to 1.5 V.		
Alarm input	An alarm is activated with a voltage between 0 V and 1.5 V. Pulled up to 5 V by a 10 kΩ resistor. The thresholds are HIGH: 3.5 V to 5 V, LOW: 0 V to 1.5 V.		
Alarm clearing input	After an alarm occurs, eliminate the root cause of the alarm, and change the input to pin 5 of the EXT CONT connector from a low level signal to a high level signal. The alarm will be cleared on the rising edge of this signal. Pulled up to 5 V by a 10 kΩ resistor. The thresholds are HIGH: 3.5 V to 5.0 V, LOW: 0 V to 1.5 V.		
Trigger input	Paused sequence operation resumes when a voltage between 0 V and 0.8 V is received. Pulled up to 5 V by a 10 kΩ resistor. The thresholds are HIGH: 2 V to 5 V, LOW: 0 V to 0.8 V.		
External voltage control input (CC, CR, CP mode)	Controls the load settings of CC, CR, CP mode through external voltage input. The input impedance is approx. 10 kΩ. CC: The setting can be controlled in the range of 0% to 100% of the rated current through external voltage input of 0 V to 10 V. CR: The setting can be controlled in the range of 0% to 100% of the conductance setting through external voltage input of 0 V to 10 V. CP: The setting can be controlled in the range of 0% to 100% of the rated power through external voltage input of 0 V to 10 V. Setting accuracy ± (1% of range) (TYP value of H range in CC mode)		
External voltage control input (CV mode)	The load setting of CV mode can be controlled through external voltage input. The rated voltage can be controlled in the range of 0% to 100% with 0 V to 10 V. The input impedance is approx. 10 kΩ. Setting accuracy ± (1% of range) (TYP value)		
External voltage control input (superimposing in CC mode)	Controls the load setting of CC mode by adding current through external voltage input. Adds current in the range of -100% to 100% of the rated current for -10 V to 10 V. The input impedance is approx. 10 kΩ. Setting accuracy ± (1% of range) (TYP value of H range)		
Load-on status output	On when load is on. Open-collector output from a photocoupler. *1		
Range status output	Outputs current range state L, M, and H using 2 bits. Open-collector output from a photocoupler. *1		
ALARM 1 output	TURNS ON when overvoltage detection, reverse-connection detection, overheat detection, alarm input detection, front-panel load input terminal overcurrent detection, or parallel operation anomaly detection is activated. Open-collector output from a photocoupler. *1		
ALARM 2 output	TURNS ON when OCP, OPP, UVP, or WDP is activated.		
DIGITAL 0 / DIGITAL 1 output	Logic signal output during a step of a sequence. Output impedance: approx. 330 Ω, output voltage: approx. 3.3 V _{EMF}		
DIGITAL 2 output	Input/output switchable. Output: Logic signal output during a step of a sequence. The output impedance is 330 Ω. Input: Trigger input signal for the sequence and the measurement functions. The thresholds are HIGH: 2 V to 5 V, LOW: 0 V to 0.8 V.		
Current monitor output	Outputs 0 V to 10 V for 0% to 100% of the rated current of each range. Accuracy ± (1% of range) (TYP value of H range)		
Short signal output	Relay contact turns on when the short function is turned on (30 Vdc/1 A).		

*1 The maximum voltage that can be applied to the photocoupler is 30 V. The maximum current is 4 mA.

BNC connector			
Trigger output	Transmits 10 µs pulses when trigger output is ON during sequence operation and during step execution. Transmits 1 µs pulses during switching operation.		
Current monitor output	Outputs 0 V to 2 V for 0% to 100% of the rated current of each range.		
Isolation voltage	Accuracy ± (1% of range) (TYP value of H range)		

Communication function			
LAN	IEEE 802.3 100Base-TX / 10Base-T Ethernet IPv4, RJ-45 connector		
RS232C	D-SUB 9-pin connector Baud rate: 9600, 19200, 38400, 115200 bps Data length: 8 bits, Stop bits: 1 bit, Parity bit: None, Flow control: None, CTS-RTS		
USB	Complies with the USB 2.0 specification. Data rate: 480 Mbps (High speed) Complies with the USBT MC-USB488 device class specifications.		

General specifications				
Input voltage range/ Input frequency range	100 Vac to 240 Vac (90 Vac to 250 Vac) single phase, continuous / 47 Hz to 63 Hz			
Power consumption	50 V _{Amax}	50 V _{Amax}	85 V _{Amax}	
Inrush current (peak value)		45 A _{peak}		
Environmental conditions	Operating temperature range Operating humidity range Storage temperature range Storage humidity range Installation location	0 °C to 40 °C (32 °F to 104 °F) 20%rh to 85%rh (no condensation) -20 °C to 70 °C (-4 °F to 158 °F) 90%rh or less (no condensation) Indoor use, altitude of up to 2000 m, overvoltage category II.		
Insulation resistance	Between primary and input terminals Between primary and chassis Between input terminals and chassis	500 Vdc, 30 MΩ or more (70%rh or less)		
Withstanding voltage	Between primary and input terminals Between primary and chassis Between input terminals and chassis	No abnormalities at 1500 Vac for 1 minute. No abnormalities at 1500 Vac for 1 minute. No abnormalities at 750 Vac for 1 minute.		
Dimensions	Unit: mm (inches)	214.5 (8.45)W×124 (4.88)H×400 (15.75)Dmm(inches)	429.5 (16.91)W×128 (5.04)H×400 (15.75)Dmm(inches)	
Weight	Approx. 7 kg (15.4 lb.)	Approx. 7.5 kg (16.5 lb.)	Approx. 14 kg (30.9 lb.)	
Accessories	Power cord, Rear-panel load input terminal cover, Load input terminal screw set (2 sets), Screws for the rear-panel load input terminal cover (2 pcs.), Front-panel load input terminal cover, Front-panel load input knob set, External control connector kit, Setup Guide, CD-ROM, Quick Reference, Safety Information			
Electromagnetic compatibility (EMC) *1 *2	Complies with the requirements of the following directive and standards. EMC Directive 2014/30/EU, EN 61326-1 (Class A*3), EN 55011 (Class A*3, Group 1*4), EN 61000-3-2, EN 61000-3-3 Applicable under the following conditions. The maximum length of all cabling and wiring connected to the PLZ-5W must be less than 3 m.			
Safety *1	Complies with the requirements of the following directive and standards. Low Voltage Directive 2014/35/EU*2 EN 61010-1 (Class I*5, Pollution Degree 2*6)			

*1 Does not apply to specially ordered or modified PLZ-5Ws. *2 Limited to products that have the CE/UKCA mark on their panels. *3 This is a Class A equipment. This product is intended for use in an industrial environment. This product may cause interference if used in residential areas. Such use must be avoided unless the user takes special measures to reduce electromagnetic emissions to prevent interference to the reception of radio and television broadcasts. *4 This is a Group 1 equipment. This product does not generate and/or use intentionally radio-frequency energy, in the form of electromagnetic radiation, inductive and/or capacitive coupling, for the treatment of material or inspection/analysis purpose. *5 This is a Class I equipment. Be sure to ground this product's protective conductor terminal. The safety of this product is only guaranteed when the product is properly grounded. *6 Pollution is addition of foreign matter (solid, liquid or gaseous) that may produce a reduction of dielectric strength or surface resistivity. Pollution Degree 2 assumes that only non-conductive pollution will occur except for an occasional temporary conductivity caused by condensation.


■ PLZ2405WB Specifications

Ratings		
Item	PLZ2405WB	
Operating voltage	0.25 Vdc to 150 Vdc	
Current	480 A	
Power	2400 W	
Current range		
H range	0 A to 480 A	
M range	0 A to 48 A	
L range	0 A to 4.8 A	
Setting accuracy		
CC mode	H range	± (0.4% of set + 0.8% of range)
	M range	± (0.4% of set + 0.8% of range)
	L range	± (0.4% of set + 5% of range)
CR mode	H range	± (0.5% of set + 1.5% of range)
	M range	± (0.5% of set + 1.5% of range)
	L range	± (0.5% of set + 5% of range)
CV mode	H,M,L range	± (0.2% of set + 0.2% of range)
CP mode	H range	± (2% of range + 0.4% current range × Vin ^{*1})
	M range	± (2% of range + 0.4% current range × Vin ^{*1})
	L range	± (2% of range + 2.5% current range × Vin ^{*1})
Measurement accuracy		
Voltmeter accuracy	± (0.1% of reading + 0.1% of range)	
Ammeter accuracy	H range	± (0.4% of reading + 0.8% of range)
	M range	± (0.4% of reading + 0.8% of range)
	L range	± (0.4% of reading + 5% of range)
Protection functions		
Over temperature protection (OTP)	Turns off the load when the heatsink temperature reaches 100 °C	


*1 Vin: Load input terminal voltage or sensing terminal voltage.

Outline drawing


●PLZ205W, PLZ405W

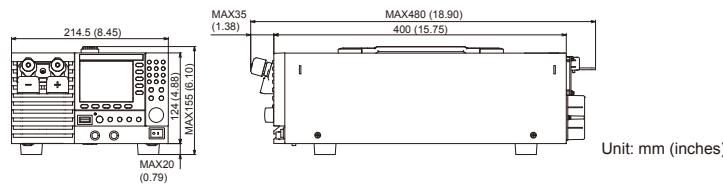

●PLZ1205W

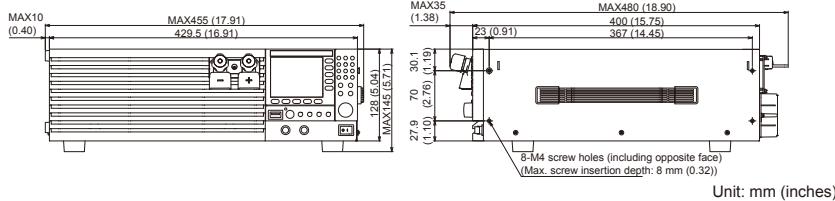

●PLZ2405WB

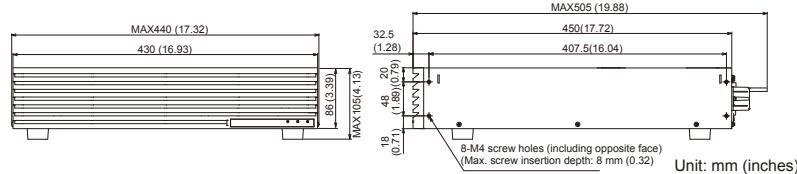

General specifications	
Item	PLZ2405WB
Input power supply voltage range	100 Vac to 240 Vac (90 Vac to 250 Vac) single-phase, continuous
Input frequency range	47 Hz to 63 Hz
Power consumption	95 VAmax
Inrush current (peak value)	45 Apeak
Operating temperature range	0 °C to 40 °C (32 °F to 104 °F)
Operating humidity range	20%rh to 85%rh (no condensation)
Storage temperature range	-20 °C to 70 °C (-4 °F to 158 °F)
Storage humidity range	90%rh or less (no condensation)
Installation location	Indoor use, altitude of up to 2000 m, overvoltage category II
Isolation voltage	±500 V
Insulation resistance	Between primary and input terminals
	500 Vdc
	30 MΩ or greater (at 70%rh humidity or less)
Withstanding voltage	Between primary and chassis
	No abnormalities at 1500 Vac for 1 minute
	Between input terminals and chassis
	No abnormalities at 1500 Vac for 1 minute
	Between input terminals and chassis
	No abnormalities at 750 Vdc for 1 minute
External dimensions	430(16.93)W×86(3.39)H×450(17.72)Dmm(inches)
Weight	Approx. 15 kg (33.07 lb)
Accessories	Power cord, Load input terminal cover, Parallel operation signal cable kit (PC01-PLZ-5W), Load input terminal screw set (2 sets), Screws for the load input terminal cover (2 pcs.), Operation manual

Sequence creation and control software

SD023-PLZ-5W (Wavy for PLZ-5W)

Make the Kikusui power supplies and electronic load more intelligent!

Expand the ideas of engineers with the sequence creation and control software "Wavy"

[Operating environment] Windows 7 / 10

The SD023-PLZ-5W (Wavy for PLZ-5W) is an application software designed for sequence creation and operation of Kikusui's PLZ-5W series of DC electronic loads. It allows users to freely carry out sequence control of power supplies and electronic loads without any programming knowledge. Users can easily edit sequences as if drawing a picture or working on a spreadsheet.

- Able to easily create and edit sequence functions using a mouse.
- Execution positions are visually displayed during sequence execution.
- Monitors voltage and current, which can be saved into files.
- Monitor data displayed in real time as a monitor graph.


**A trial version of
Wavy
is available!**

Can be used for three weeks
without any function limitations.


<https://global.kikusui.co.jp/downloads/>

Download!

Set up steps by
drawing with a
mouse in the graph
window.


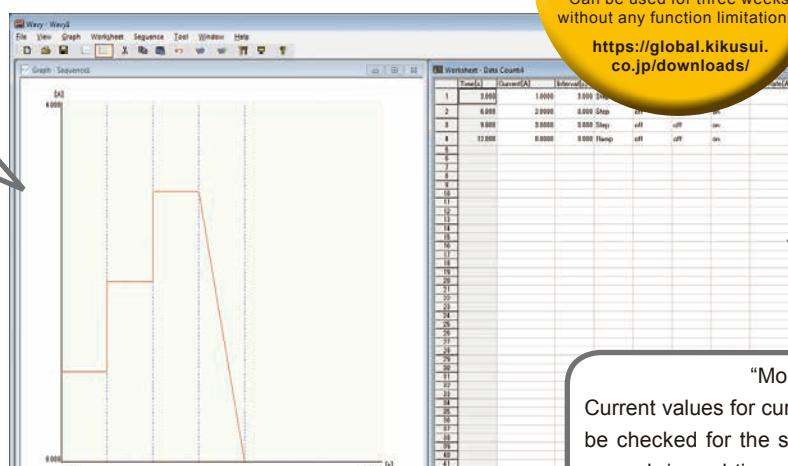


"Setting graph"
Cursor indication of
operation status on
the setting graph.

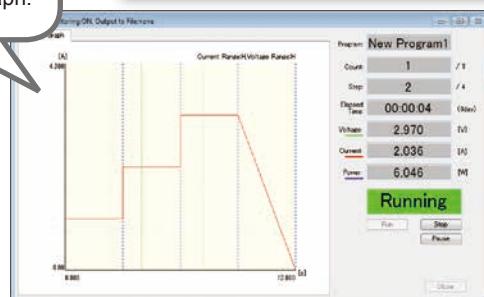


"Monitor graph"

Current values for current, voltage, and power can be checked for the sequence being executed on a graph in real time. Monitor data is displayed by placing the mouse cursor on the graph.

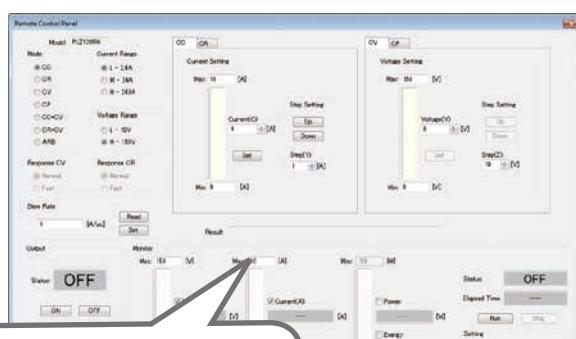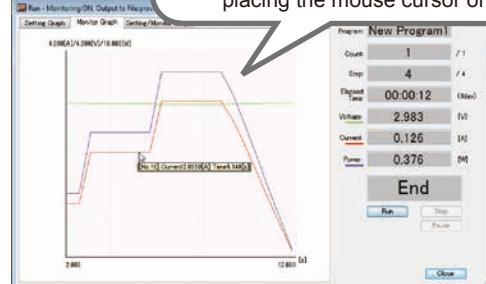

"Direct control window"

Directly control PLZ-5W in a manner similar to using a remote control. In addition, monitoring and logging of output are also possible.

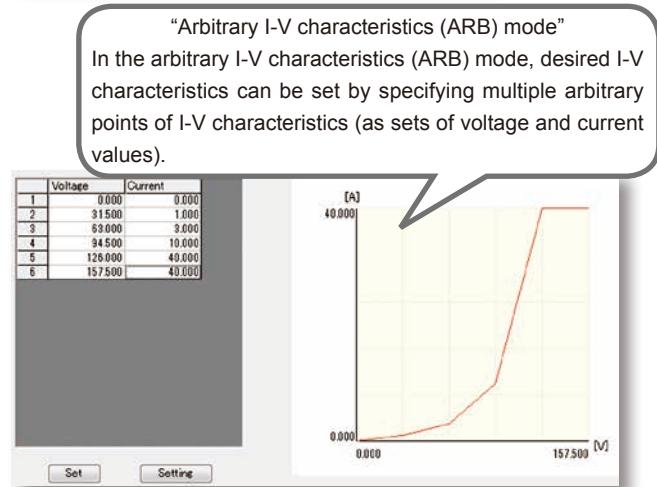

"Arbitrary I-V characteristics (ARB) mode"

In the arbitrary I-V characteristics (ARB) mode, desired I-V characteristics can be set by specifying multiple arbitrary points of I-V characteristics (as sets of voltage and current values).


GPIB converter

PIA5100

This converter converts RS232C or USB of the PLZ-5W to GPIB, enabling connection of a remote controller using GPIB.
[Accessories: Power cord set, Magnetic sheet]




[Connection example]

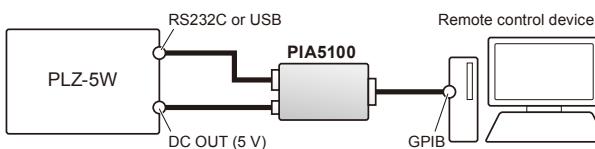

Rack adapters, brackets

These are rack mounting options.

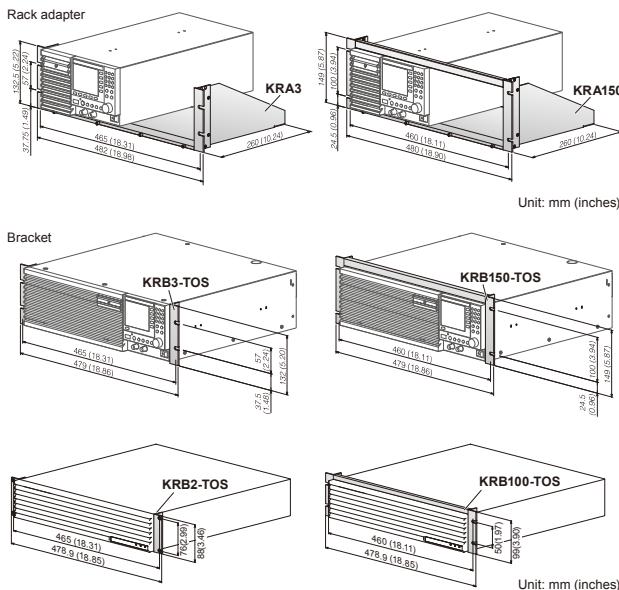

Parallel operation signal cable kit

One cable required for each slave/booster unit.

PC01-PLZ-5W

Cable length : Approx. 30 cm



*The PLZ2405WB (Booster) comes with 1 pc. of parallel operation cable (PC01-PLZ-5W).

PC02-PLZ-5W

Cable length : Approx. 1 m

Name	Model	Appropriate Model	Description
Rack adapters	KRA3	PLZ205W	For EIA inch racks
	KRA150	PLZ405W	For JIS millimeter racks
Bracket	KRB3-TOS	PLZ1205W	For EIA inch racks
	KRB150-TOS		For JIS millimeter racks
Bracket	KRB2-TOS	PLZ2405WB	For EIA inch racks
	KRB100-TOS		For JIS millimeter racks

*1 When using blank panels for rack adapters, please use KBP3-2.

●Distributor:



KIKUSUI ELECTRONICS CORPORATION

1-1-3, Higashiyama, Tsuzuki-ku, Yokohama, Kanagawa, 224-0023, Japan
Phone: +(81)45-593-0200, Facsimile: +(81)45-593-7591, <https://global.kikusui.co.jp/>

KIKUSUI AMERICA, INC. 1-310-214-0000 www.kikusuiamerica.com
 3625 Del Amo Blvd., Suite 160 Torrance, CA90503
Phone: 310-214-0000, Facsimile: 310-214-0014

KIKUSUI TRADING (SHANGHAI) Co., Ltd. www.kikusui.cn
 Room 305, Shenggao Building, No.137, Xianxia Road, Shanghai City, China
Phone: 021-5887-9067, Facsimile: 021-5887-9069

KIKUSUI ELECTRONICS EUROPE GmbH
 Grossenbaumer Weg 8, 40472 Duesseldorf, Germany
Phone: +49(211)54257600, E-mail: support@kikusui-europe.com

For our local sales distributors and representatives, please refer to "sales network" of our website.

■ All products contained in this catalogue are equipment and devices that are premised on use under the supervision of qualified personnel, and are not designed or produced for home-use or use by general consumers. ■ Specifications, design and so forth are subject to change without prior notice to improve the quality. ■ Product names, company names and brand names contained in this catalogue represent the respective registered trade name or trade mark. ■ Colors, textures and so forth of photographs shown in this catalogue may differ from actual products due to a limited fidelity in printing. ■ Although every effort has been made to provide the information as accurate as possible for this catalogue, certain details have unavoidably been omitted due to limitations in space. ■ If you find any misprints or errors in this catalogue, it would be appreciated if you would inform us. ■ Please contact our distributors to confirm specifications, price, accessories or anything that may be unclear when placing an order or concluding a purchasing agreement.

Printed in Japan

Issue: May. 2025 202505PDFEC101