

# WHITE RABBIT ZEN TP-FL

The fundamental standalone node



## WR-ZEN TP-FL hw version >v4.0

The WR-ZEN TP-FL is the fundamental standalone node that provides the White Rabbit features to a wide range of applications making use of its redundant connections.

The WR-ZEN TP-FL easily distributes time and frequency to other equipment by implementing widely available timing protocols: PTP, NTP, 10MHz/PPS.

The WR-ZEN TP-FL combines ultra-stable clocks with low jitter and temperature compensated clock resources to enhance its synchronization accuracy in a costeffective 1U form factor.

Optional expansion modules are available in order to provide additional configurable timing outputs, including 1PPS, 10MHz and IRIG signals, or/and enhanced holdover capability.

- Sub-nanosecond time accuracy and picosecond level precision
- WR, PTPv2 and NTP over optical interfaces
- Extended management and monitoring
- Distance range over 80km using fiber
- Multi-source time references
- Linux-based WRZ OS
- Seamless Failover mechanisms & Holdover
- Robustness & Redundancy
- Configurable timing outputs via expansion modules
- Built-in precise timing sources monitoring
- Support for HATI

**Safran Electronics & Defense is with you every step of the way, building in the intelligence that gives you a critical advantage in observation, decision-making and guidance.**

## High Accuracy

The WR-ZEN TP-FL implements the White-Rabbit (WR) protocol, an high-accuracy extension of PTP based on SyncE, that allows to easily distribute sub-nanoseconds timing within Metro Area Network distances and beyond. Worth to mention, that a timing network using WR protocol is not affected by the traffic load nor the number of hops.

## Resiliency

The WR-ZEN devices incorporates seamless failover mechanisms to switch between multiple timing sources when a failure is detected, ensuring maximum availability and optimal synchronization performance even during the transitions. Additionally, an optional Holdover oscillator can be included to maintain high accuracy (1.5us < 24h) even if all timing references are down.

## Precise timing sources monitoring

The WRZ-OS incorporates a precise timing sources monitoring system which allow to evaluate the synchronization performance of multiple timing sources (WR, PTP, 1PPS+10MHz) received in the unit. Relevant metrics are computed and can be visualized in the WebUI. The monitoring data is collected and stored in a built-in database that can be exported using the integrated management tools

## Advanced Management

The WR-ZEN TP devices enable extensive monitoring via REST-API and SNMP including the combination of smart alerts with traps. By providing templates, it facilitates its integration with third-party networking and monitoring tools. Moreover, it allows automatic topology discovery via LLDP and comprehensible remote logging through rsyslog.

## Interoperability

Used as time provider or interoperability node, the WR-ZEN TP-FL can distribute standard PTP IEEE 1588-2008 and Synchronous Ethernet for the last hop through its 2x fiber ports using the most common profiles such as Telecoms profiles (G.8265.1, G.8275.1) & Power profiles (IEEE C37.238-2011 and IEEE/IEC 61850-9-3). It also provides NTP interoperability and 10MHz/PPS distribution.

## Intuitive configuration

The new version of WRZ-OS introduces a complete web interface redesigned to provide an excellent user experience: By the means of timing presets, a complex configuration can be done in a few clicks. Simultaneously, the CLI tool has also been rethought to allow straightforward configuration from the terminal to advanced users.

## Enhanced Security

TACACS+/RADIUS have been integrated to enable remote authentication for networked access control through a centralized server. The secure version of most of the protocols such as SFTP, HTTPS, SNMPv3 has been implemented and a firewall has been incorporated to provide a robust system against malicious users.


## Technical Specifications

Timing & Synchronization		Security Features																						
Multi-sources	<p><i>Failover mechanism to ensure continuous operation by switching over multiple timing sources in case of failure:</i></p> <ul style="list-style-type: none"> <li>• White Rabbit (accuracy &lt;1ns)</li> <li>• External references (GNSS, Atomic Clocks)</li> <li>• PTP</li> <li>• NTP (Time of Day only)</li> </ul> <p><i>Precise timing sources monitoring to evaluate the synchronization performance of multiple sources.</i></p>	<ul style="list-style-type: none"> <li>• Authentication: RADIUS; TACACS+</li> <li>• Enable/Block protocols</li> <li>• SFTP/SCP: Securely transfers files to and from the device over an SSH session</li> <li>• SNMP v3: Remotely configure and manage over an encrypted connection</li> <li>• HTTPS support</li> <li>• Firewall configuration</li> <li>• Alert notifications via SNMP traps and email</li> </ul>																						
WR	<p>Supports HATI (Safran's High Accuracy IP Core)</p> <p>Supports GM/ Master/ BC/ Slave modes</p>																							
PTP IEEE 1588-2008	<p>Supports GM/ Master/ BC/ Slave modes, E2E/P2P, L2/L3, Multicast/Unicast.</p> <p>Support for using PTP timing sources for WR fanout</p> <p>Supported Profiles:</p> <ul style="list-style-type: none"> <li>• Default</li> <li>• G.8265.1[1]</li> <li>• G.8275.1 [1][2]</li> <li>• IEEE C37.238-2011[1]</li> <li>• IEEE/IEC 61850-9-3 [1]</li> <li>• Enterprise [1]</li> <li>• IEEE 1588-2019 HA [1]</li> </ul>																							
NTP	<p>Supports Client &amp; Server modes</p> <p>Supports NTP v2, v3 &amp; v4</p> <p>Supports hardware timestamping</p> <p>Multiple servers configuration</p> <p>NTS support</p>																							
SyncE	<ul style="list-style-type: none"> <li>• Available in all PTP ports</li> <li>• Supports key sections of the ITU-T G.8261, G.8262 &amp; G.8264</li> </ul>																							
IRIG-B (optional)	Supported via expansion card																							
Holdover (optional)	Accuracy (learning 3 days from GNSS) below 1.5us @ 24h	<p>Specifications: 10MHz output</p> <table border="1"> <thead> <tr> <th>Phase noise (dBc/Hz)</th> <th>GM</th> <th>Slave</th> </tr> </thead> <tbody> <tr> <td>1 Hz</td> <td>-86.2</td> <td>-76.5</td> </tr> <tr> <td>10 Hz</td> <td>-87.6</td> <td>-79.7</td> </tr> <tr> <td>100 Hz</td> <td>-107.2</td> <td>-112.4</td> </tr> <tr> <td>1 kHz</td> <td>-140.8</td> <td>-143.6</td> </tr> <tr> <td>10 kHz</td> <td>-143.0</td> <td>-145.3</td> </tr> <tr> <td>100 kHz</td> <td>-146.0</td> <td>-149.1</td> </tr> </tbody> </table> <p>Signal waveform &amp; Levels: LVTTL into 50 ohm, SMA</p>		Phase noise (dBc/Hz)	GM	Slave	1 Hz	-86.2	-76.5	10 Hz	-87.6	-79.7	100 Hz	-107.2	-112.4	1 kHz	-140.8	-143.6	10 kHz	-143.0	-145.3	100 kHz	-146.0	-149.1
Phase noise (dBc/Hz)	GM	Slave																						
1 Hz	-86.2	-76.5																						
10 Hz	-87.6	-79.7																						
100 Hz	-107.2	-112.4																						
1 kHz	-140.8	-143.6																						
10 kHz	-143.0	-145.3																						
100 kHz	-146.0	-149.1																						
Management & Communications																								
Control	CLI & Web-GUI: HTTP(s)																							
Authentication	<ul style="list-style-type: none"> <li>• RADIUS</li> <li>• TACACS+</li> </ul>																							
Monitoring	<ul style="list-style-type: none"> <li>• SNMPv3 (SNMPv2) + Traps with enterprise MIB</li> <li>• Smart-Alerts</li> <li>• REST-API</li> </ul>																							

[1]: PTP License not included in default package

Front Panel	
UART	<ul style="list-style-type: none"> <li>• RS232 Serial, RJ45 connector (Management)</li> <li>• 1x ARM Mini- USB (B) UART (Management)</li> </ul>
Ethernet	2x 100/1000 Base-T RJ45 (Management, NTP)
SFP Ports	2x 1GbE for timing distribution (WR/PTPv2/NTP selectable)
Timing I/O	5x SMA connectors (3V @50Ω, TTL compatible): <ul style="list-style-type: none"> <li>• 10 MHz SIN OUT (LVTTL)</li> <li>• 10MHz OUT (LVTTL)</li> <li>• PPS OUT (LVTTL)</li> <li>• PPS IN (LVTTL)</li> <li>• 10MHz IN (TTL/CMOS/ECL/clipped sine)</li> </ul>
LCD display	Information panel for alerts and basic network configuration
LEDs	3xLEDs for status information
Power supply	2x Redundant & Hot-swappable <ul style="list-style-type: none"> <li>• 100-240 VAC, 50-60 Hz</li> <li>• -48 VDC modules available (optional)</li> <li>• 50W (max. 80W)</li> </ul>
Physical Specification	
Dimension	444 mm x 43 mm x 221 mm (Designed for EIA 19" rack)
Color	White (Metallic)
Weight	3.9 kg
Agency approvals	
Certifications	CE, TUV, FCC part 15 class A, RoHS, REACH, WEEE
Environmental Conditions	
Temperature	Operational: -10 to +50 °C Storage: -30 to +70 °C
Humidity	0% ~ 90% RH
Fans	2x Embedded fan modules Airflow: blowing out
Expansion modules (optional)	
FMC 4x1PPS expansion	LVTTL into 50 ohm, SMA Configurable options: <ul style="list-style-type: none"> <li>• 4x 1PPS/10 MHz/ xPPS/ IRIG-B</li> <li>• 2x 1PPS/10 MHz/ xPPS/ IRIG-B +</li> <li>+ 2x 1PPS/10 MHz/ xPPS/ IRIG-B</li> </ul>
FMC 8x1PPS expansion	LVTTL into 50 ohm, SMA Configurable options: <ul style="list-style-type: none"> <li>• 8x 1PPS/10 MHz/ xPPS/ IRIG-B</li> <li>• 4x 1PPS/10 MHz/ xPPS/ IRIG-B +</li> <li>+ 4x 1PPS/10 MHz/ xPPS/ IRIG-B</li> </ul>

Ordering information	
Base unit	P/N: EQP-TMP-FL-01
Product configuration	P/N
WR ZEN TP FL	EQP-TMP-FL-01
WR ZEN TP FL with FMC 4x1PPS	EQP-TMP-FL-4-01
WR ZEN TP FL with FMC 8x1PPS	EQP-TMP-FL-8-01
WR ZEN TP FL with HO	EQP-TMP-FL-02
WR ZEN TP FL with FMC 4x1PPS & HO	EQP-TMP-FL-4-02
WR ZEN TP FL with FMC 8x1PPS & HO	EQP-TMP-FL-8-02
WR ZEN TP FL with -48 VDC	EQP-TMP-FL-100

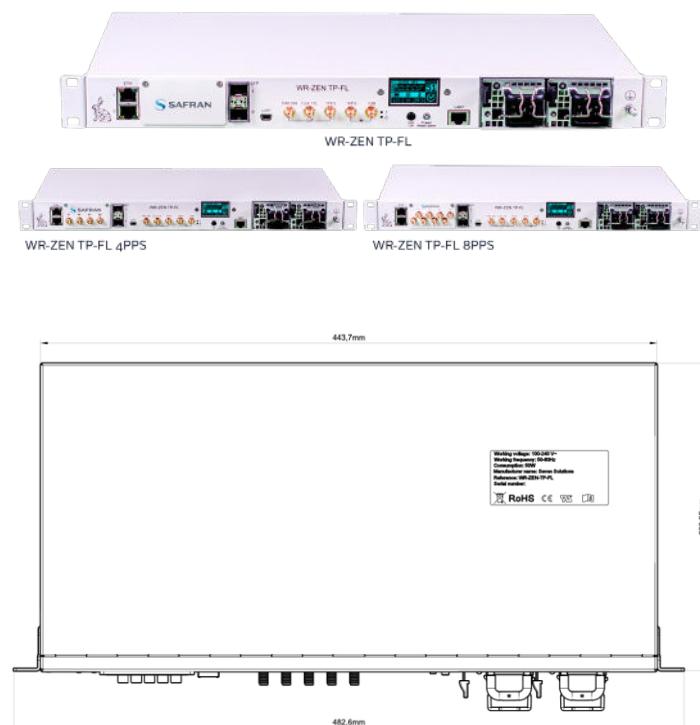

---

**POWERED  
BY TRUST**

---

[safran-navigation-timing.com](http://safran-navigation-timing.com)



June 16, 2025